

Model	Rasio kecepatan	Backlash	Berat	Nilai torsi pada 2000r/min input		Torsi puncak diizinkan di berhenti awal		Nilai maks yang diizinkan dari torsi beban rata-rata		Torsi instan maks yang diizinkan		Kecepatan input maks yang diizinkan		Kecepatan input rata-rata yang diizinkan		Momen inersia	
		Arcsec	Kg	Nm	Kgfm	Nm	Kgfm	Nm	Kgfm	Nm	Kgfm	R/min		R/min		$\times 10^{-4} \text{kgm}^2$	$\times 10^{-5} \text{kg FMS}^2$
ZXS40	50:1	≤30	4.54	178	18	523	53	255	26	892	91	5600	4000	3600	3000	4.5	4.59
	80:1			268	27	675	69	369	38	1270	130						
	100:1			345	35	738	75	484	49	1400	143						
	120:1			382	39	802	82	586	60	1530	156						
	160:1			382	39	841	86	586	60	1530	156						

Catatan: ZXS40 memiliki dua jenis ukuran lubang poros: lubang poros konvensional standar 19mm dan lubang kunci 6mm; Lubang poros tidak konvensional 22mm, keyway 8mm.

ZXS45	50:1	≤30	6.7	229	23	650	66	345	35	1235	126	5000	3800	3300	3000	8.68	8.86
	80:1			407	41	918	94	507	52	1651	168						
	100:1			459	47	982	100	650	66	2041	208						
	160:1			523	53	1147	117	819	84	2483	253						

Catatan: ZXS45 memiliki dua jenis ukuran lubang poros: lubang poros konvensional standar 19mm dan kunci 6mm; Lubang poros tidak konvensional 22mm, keyway 8mm.

ZXS50	100:1	≤30	15	611	62	1274	130	866	88	2678	273	4500	3500	3000	2500	12.5	12.8
	160:1			688	70	1534	156	1096	112	3185	325						

Catatan: ZXS50 memiliki dua jenis ukuran lubang poros: lubang poros konvensional standar 19mm dan lubang kunci 6mm; Lubang poros tidak konvensional 22mm, keyway 8mm.



ZXS58	100:1	≤30	17	905	92	2067	211	1378	141	4134	422	4000	3000	2700	2200	27.3	27.9
	160:1			969	99	2392	244	1573	160	4459	455						

Catatan: ZXS58 memiliki dua jenis ukuran lubang poros: lubang poros konvensional standar 19mm dan lubang kunci 6mm; Lubang poros tidak konvensional 22mm, keyway 8mm.


ZXS65	100:1	≤30	20	1236	126	2990	305	1976	202	6175	630	3500	2800	2400	1900	46.8	47.8
	160:1			1236	126	3419	349	2041	208	6175	630						

Catatan: ZXS65 memiliki dua jenis ukuran lubang poros: lubang poros konvensional standar 19mm dan lubang kunci 6mm; Lubang poros tidak konvensional 22mm, keyway 8mm.


ZXS14 Harmonic Reducer

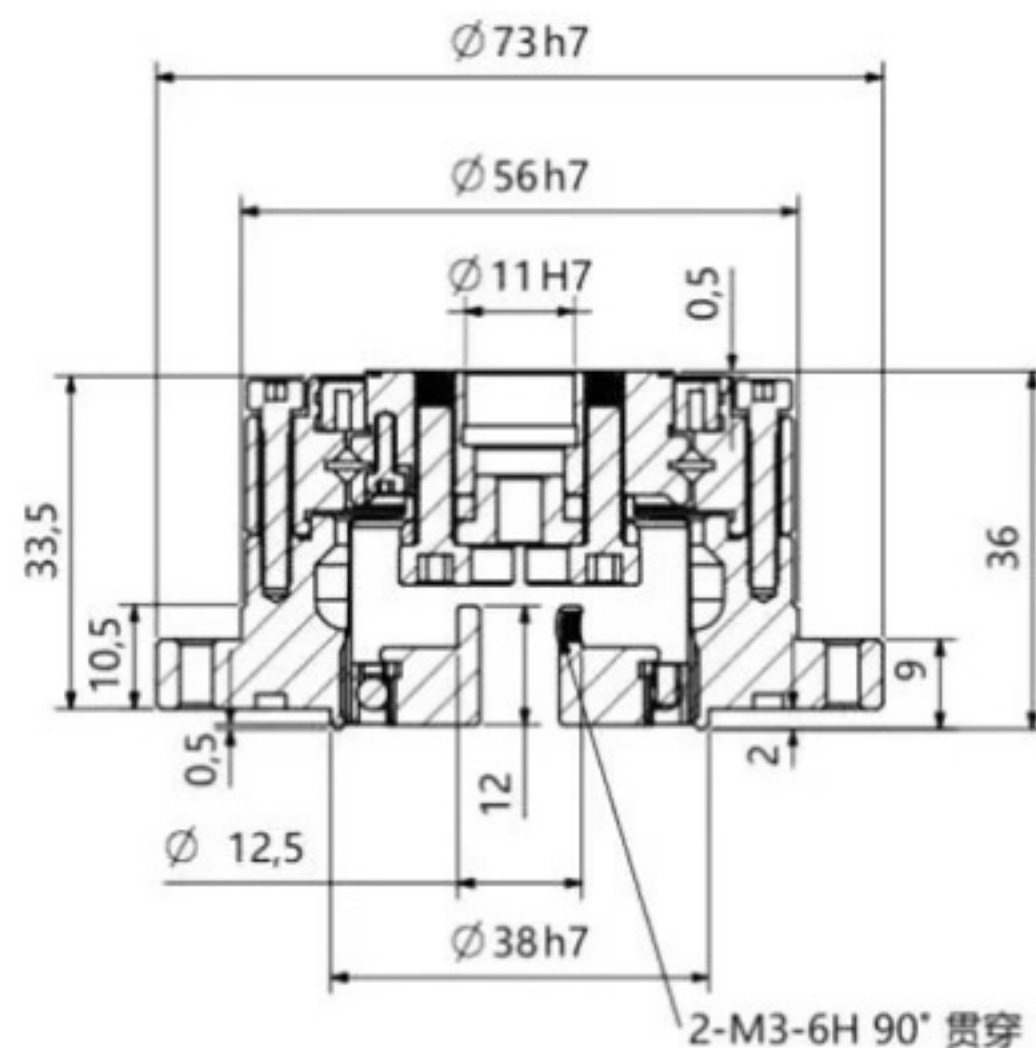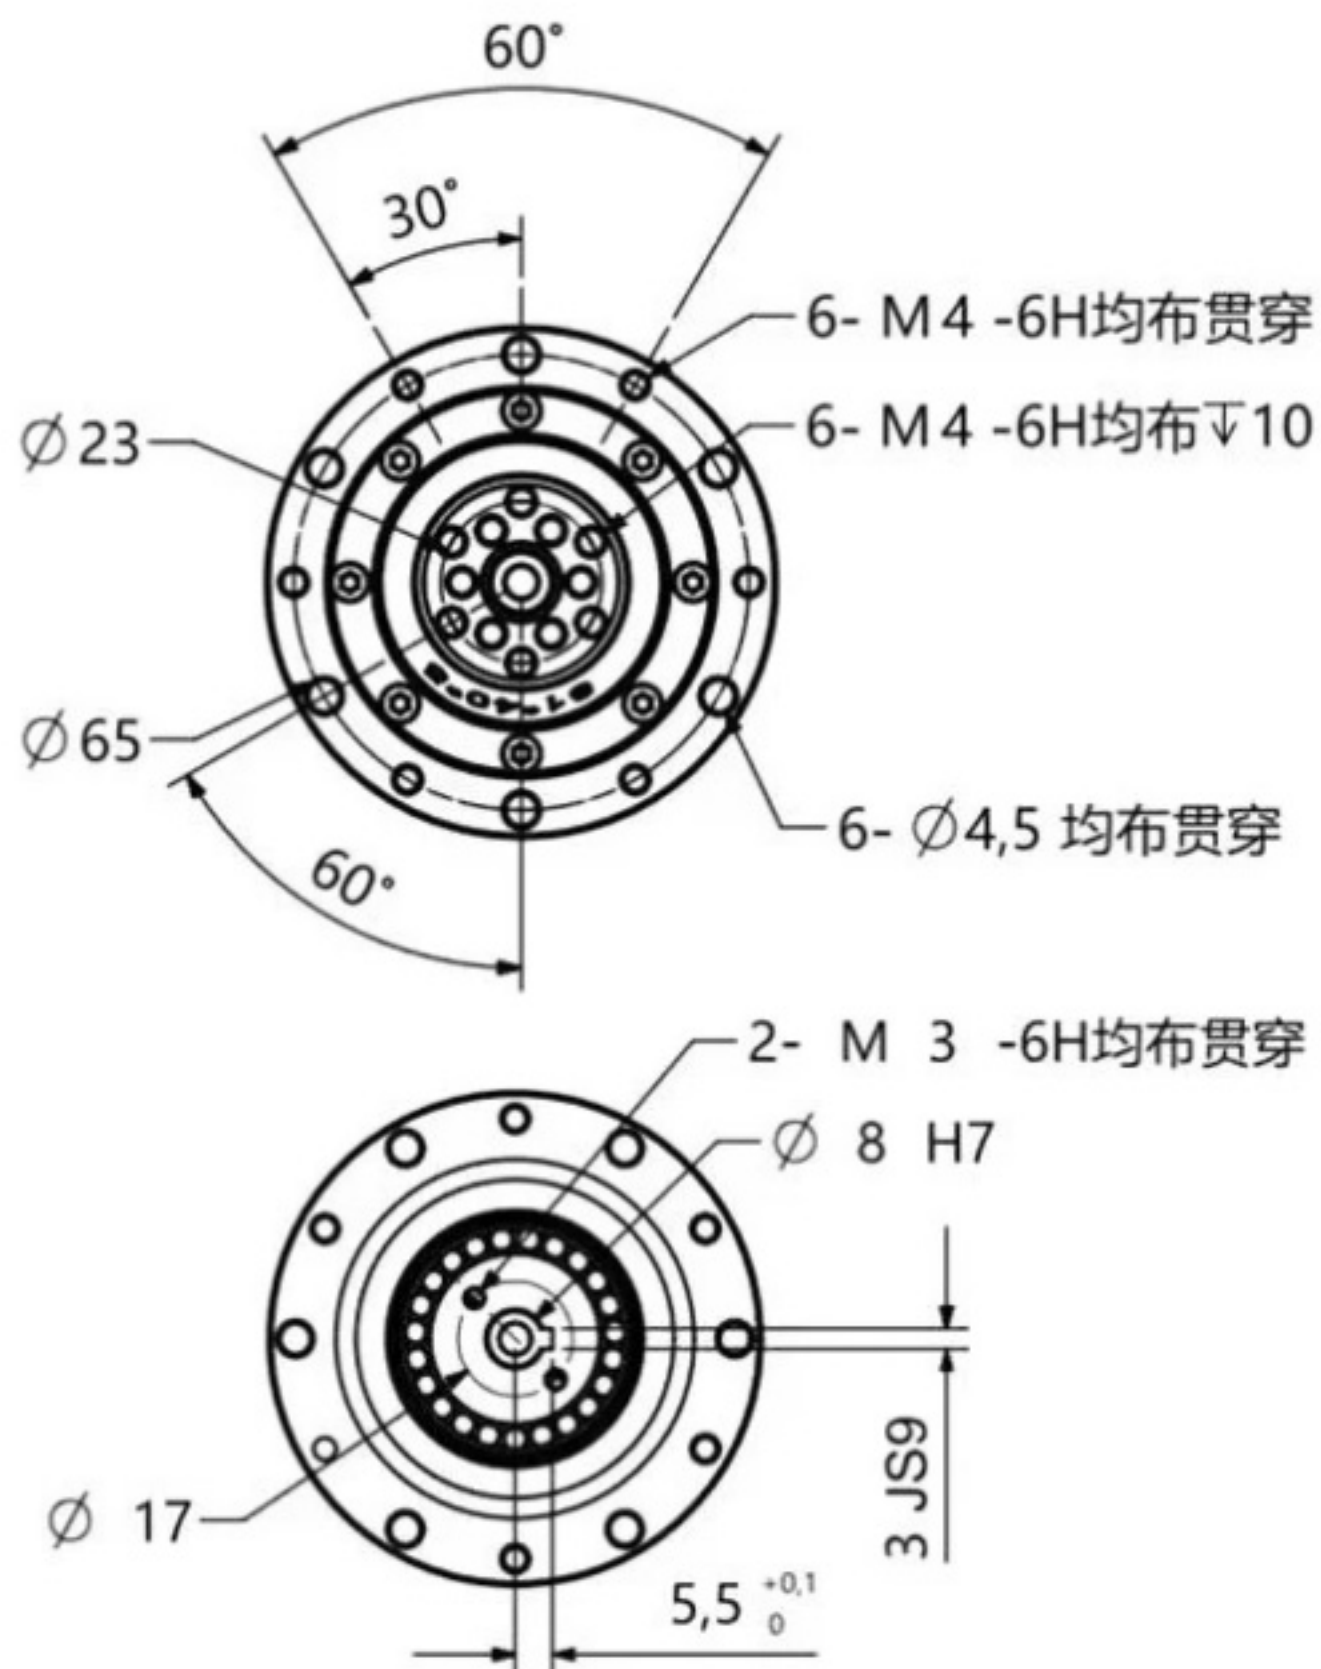

Motor flange mounting plate


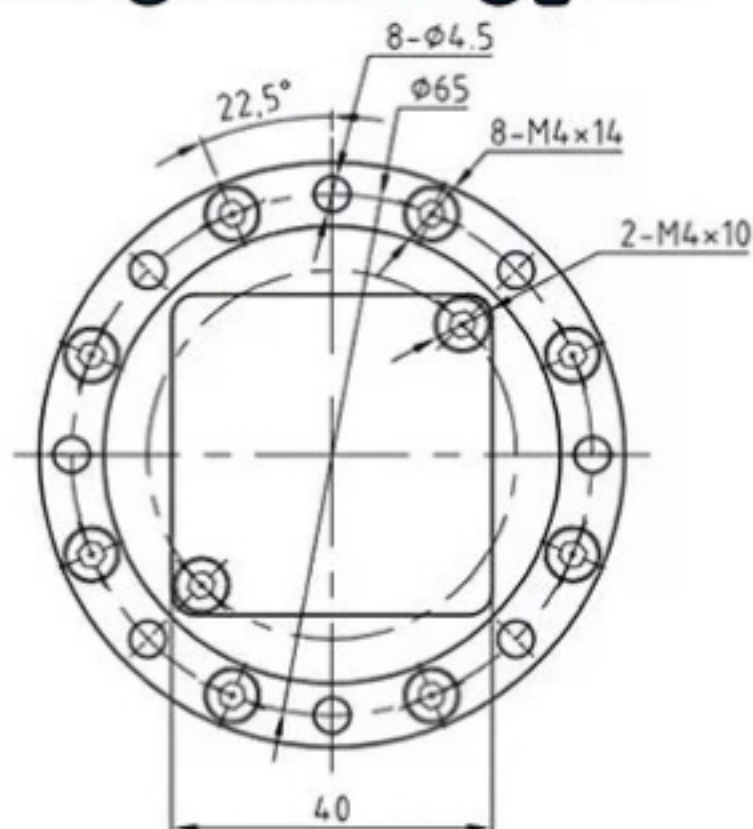


Adapted motor size

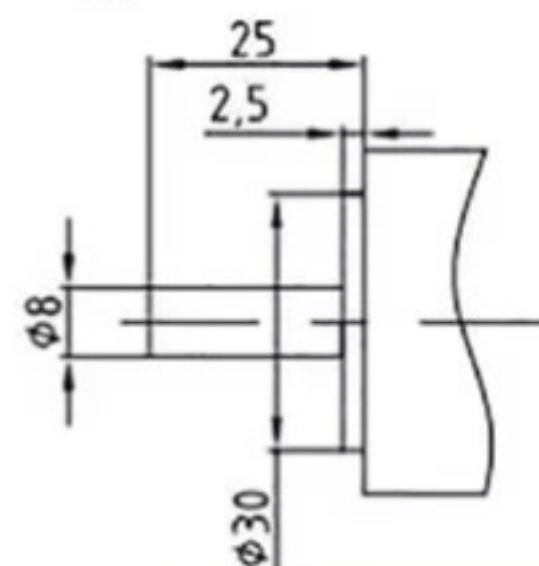


For 100W 40mm
Flange Servo Motor


ZXS14 Harmonic Reducer

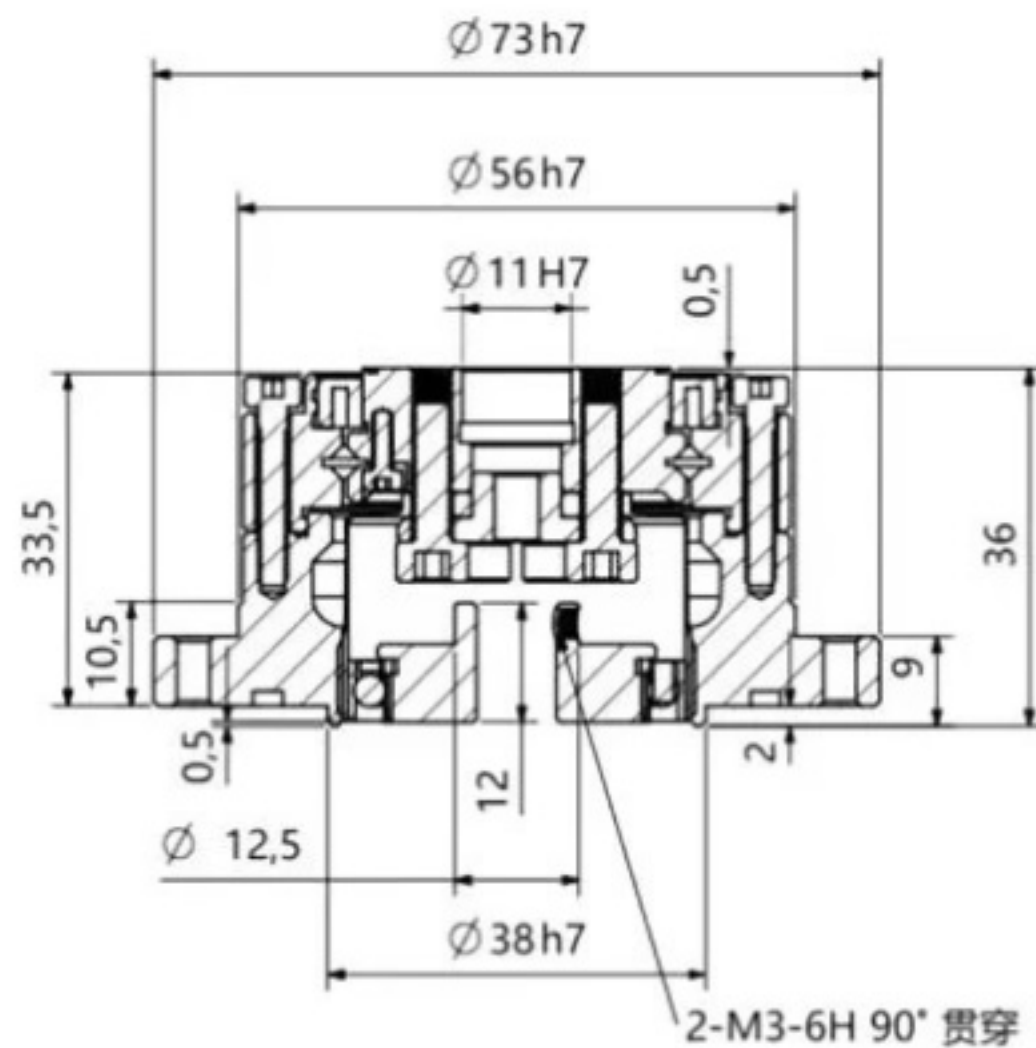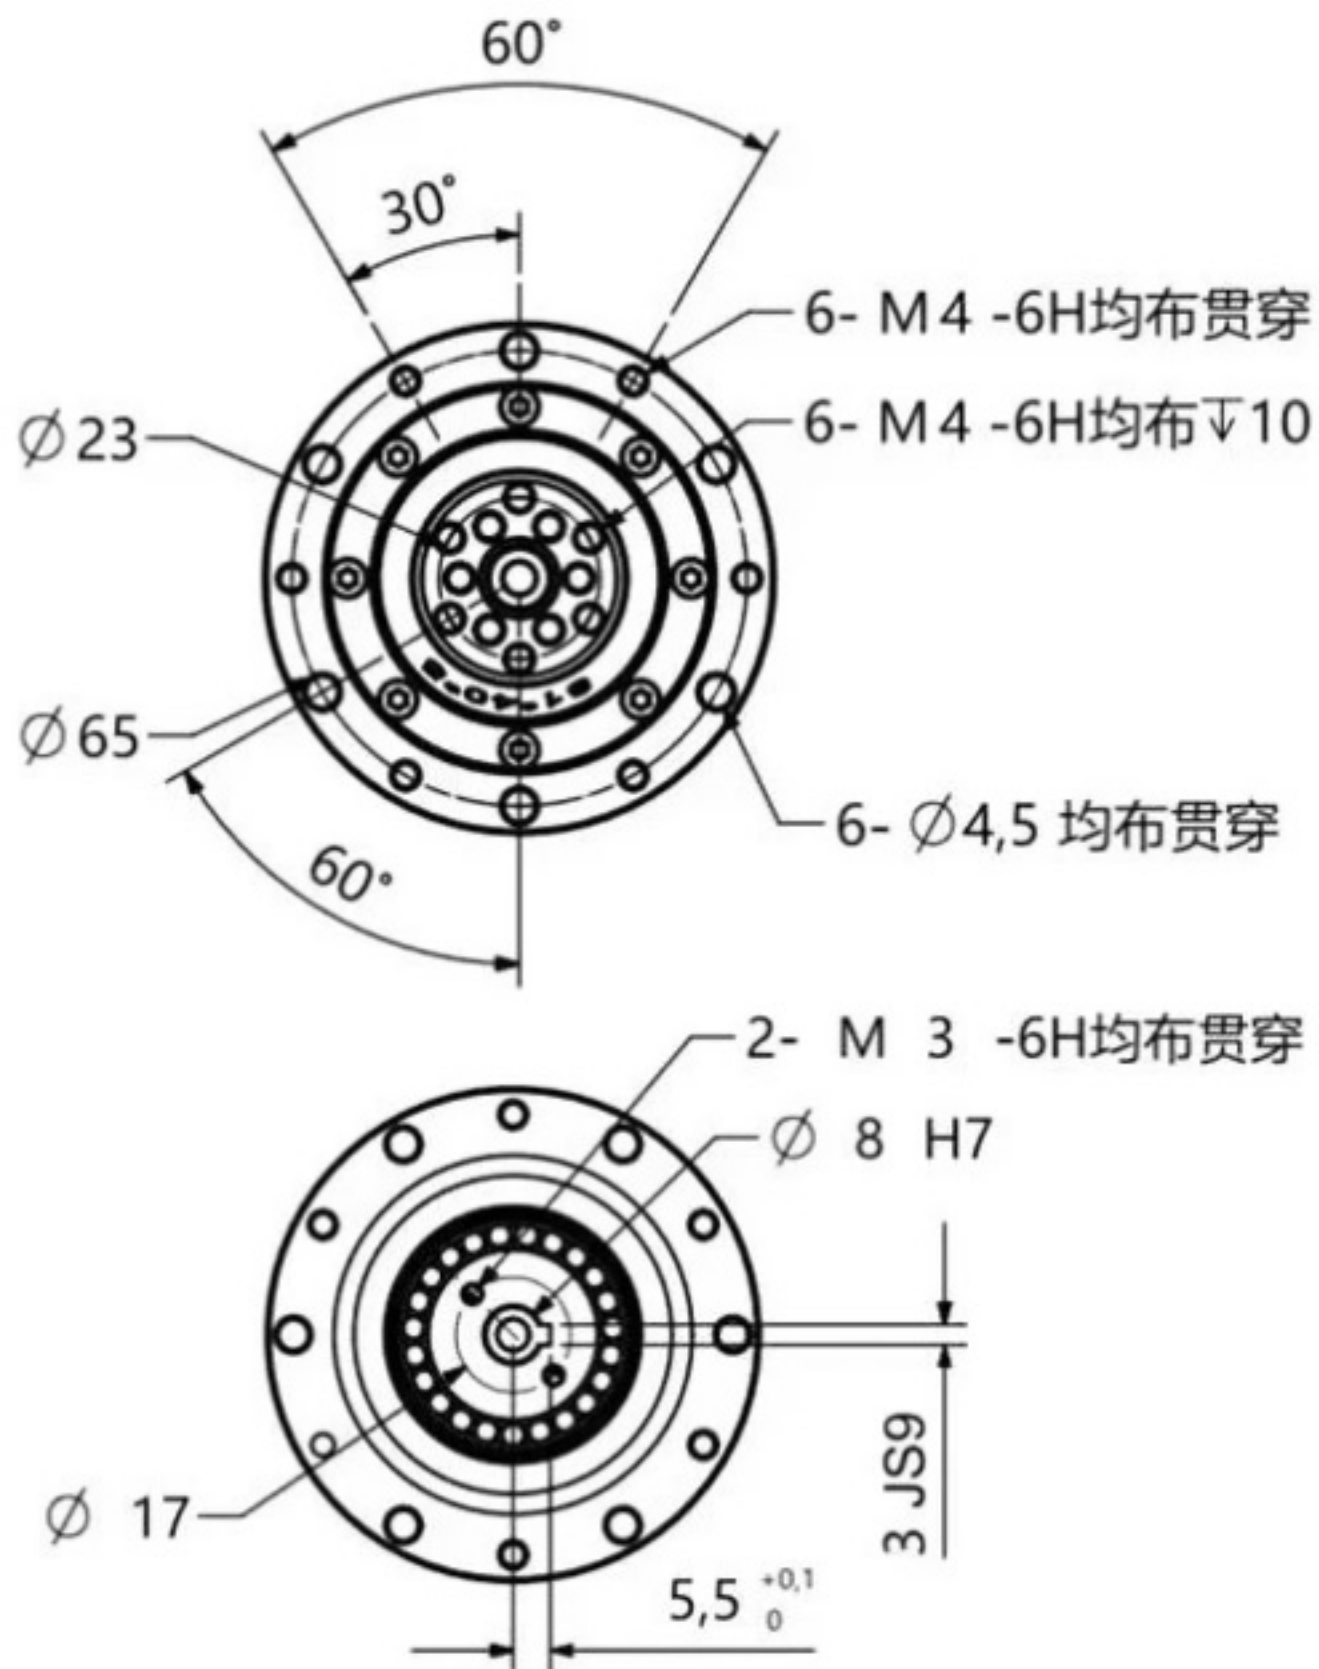

Motor flange mounting plate


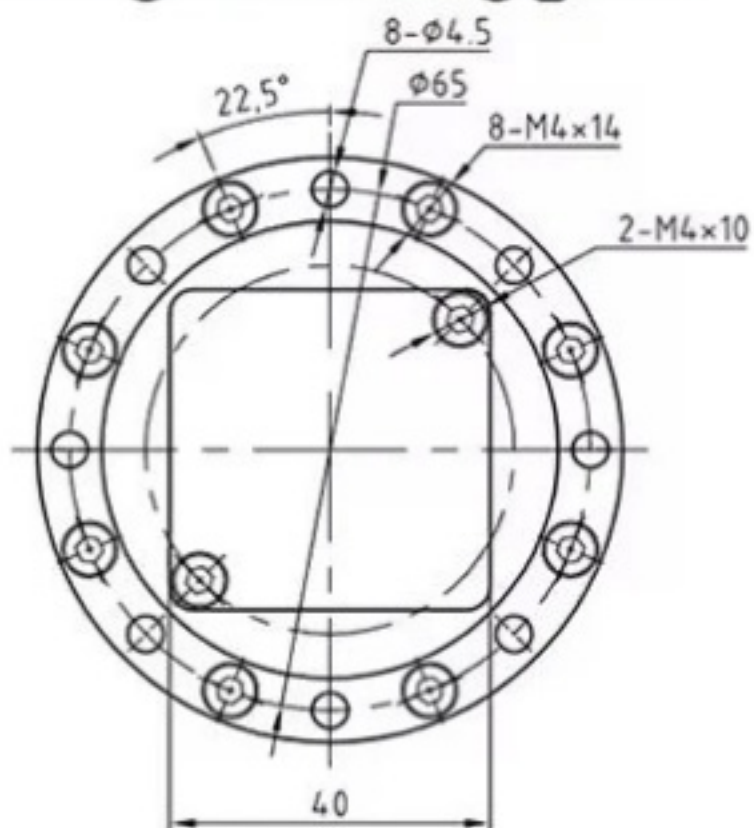


Adapted motor size

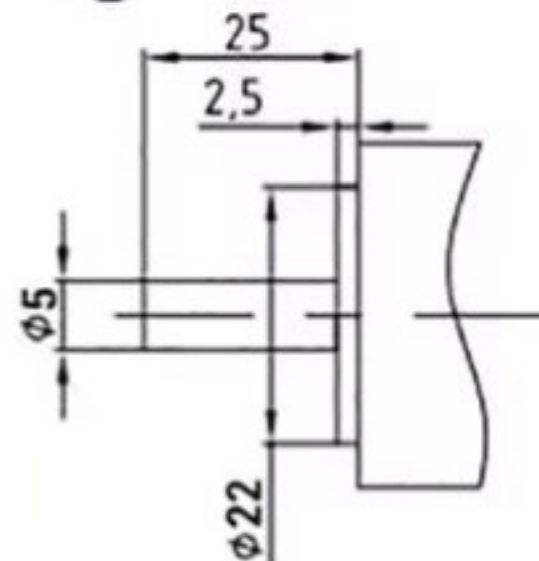


**For Nema 17 42mm
Flange Stepper Motor**


ZXS17 Harmonic Reducer

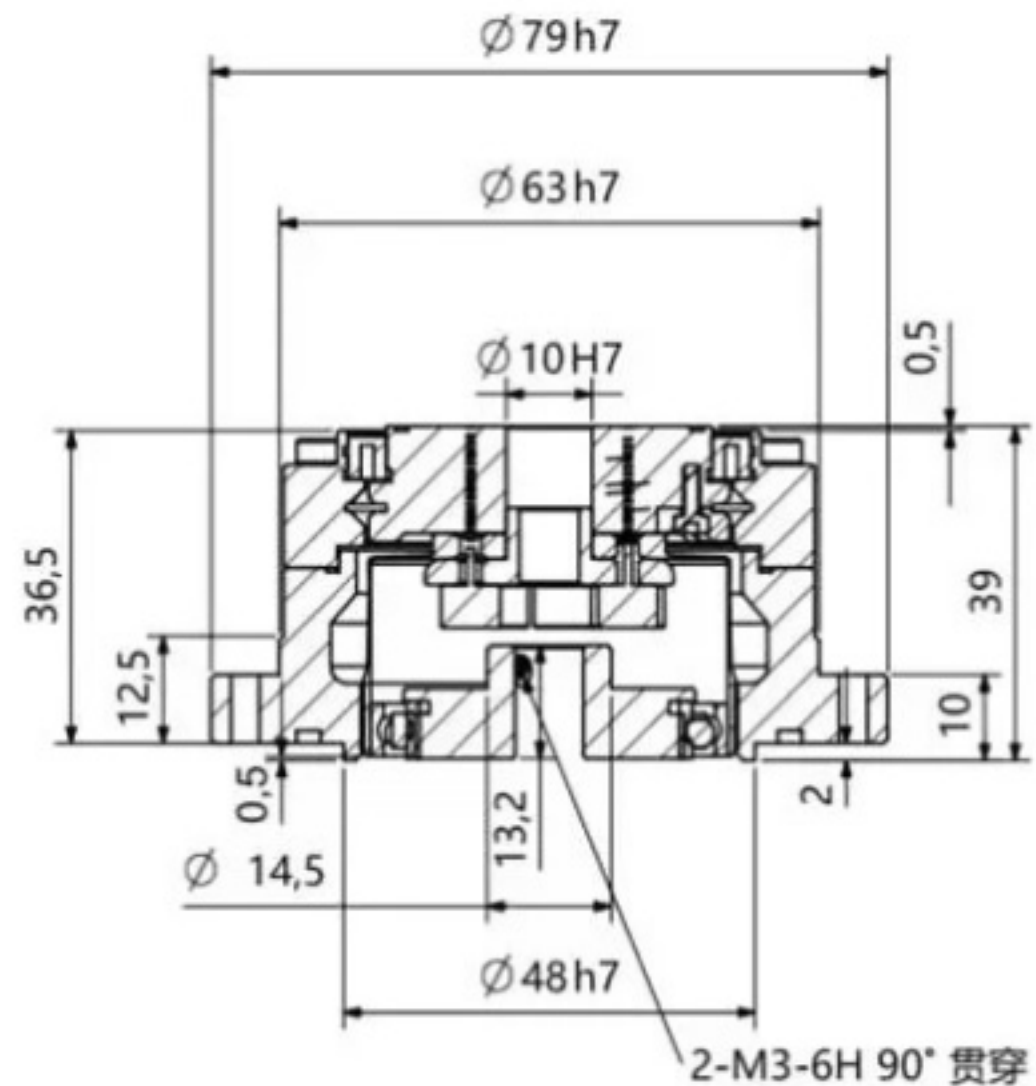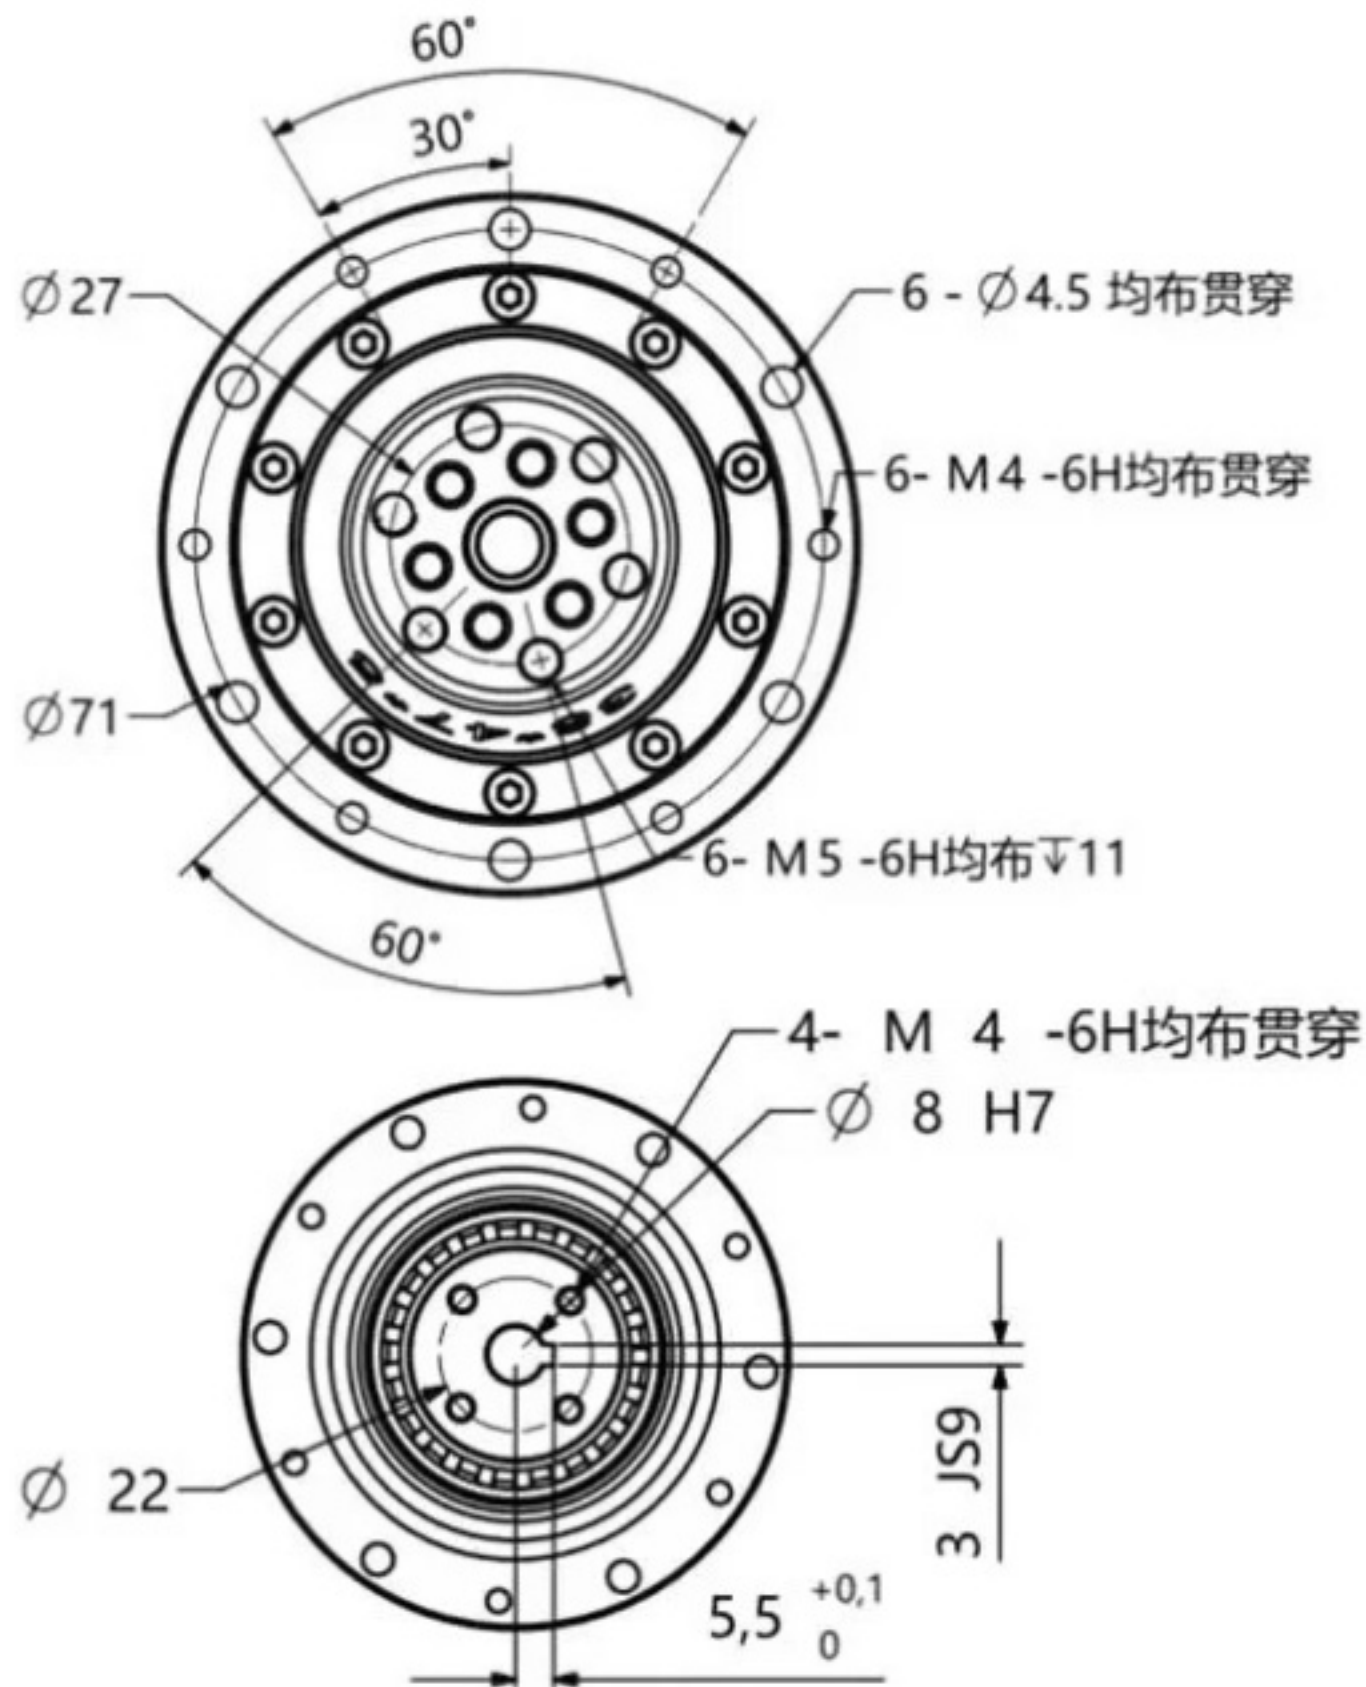

Motor flange mounting plate


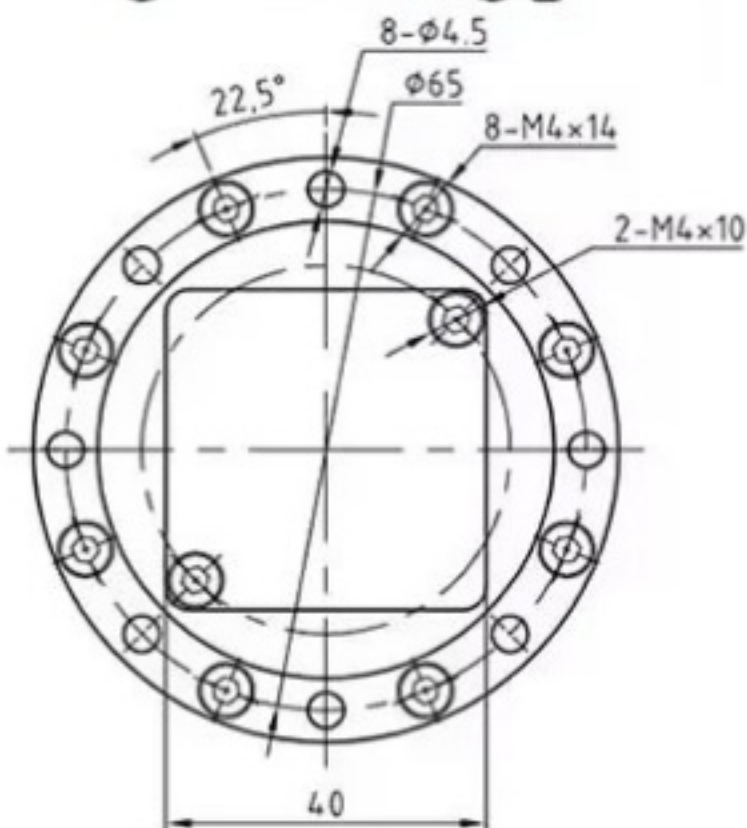


Adapted motor size

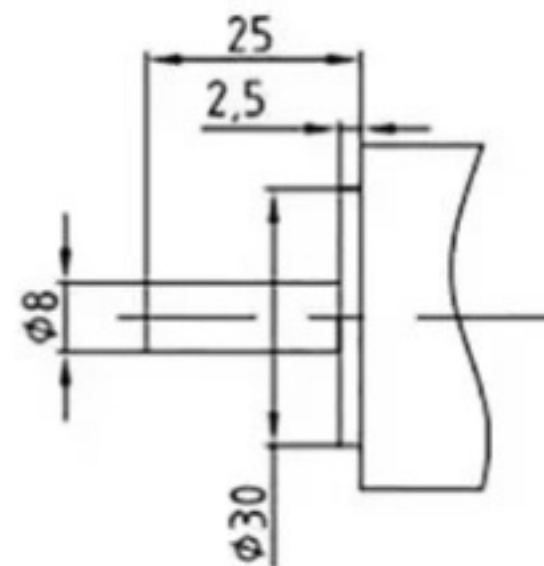


**For 100W 40mm
Flange Servo Motor**


ZXS17 Harmonic Reducer

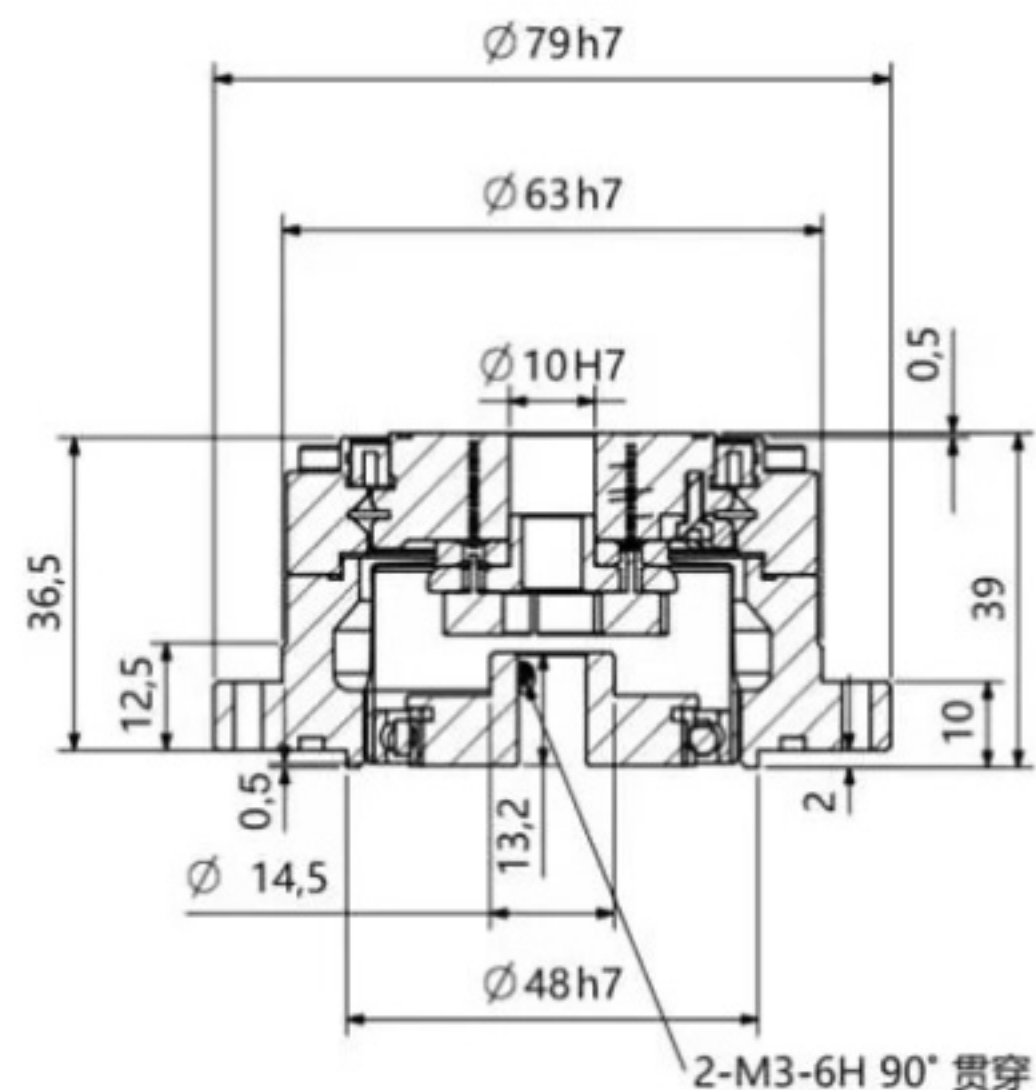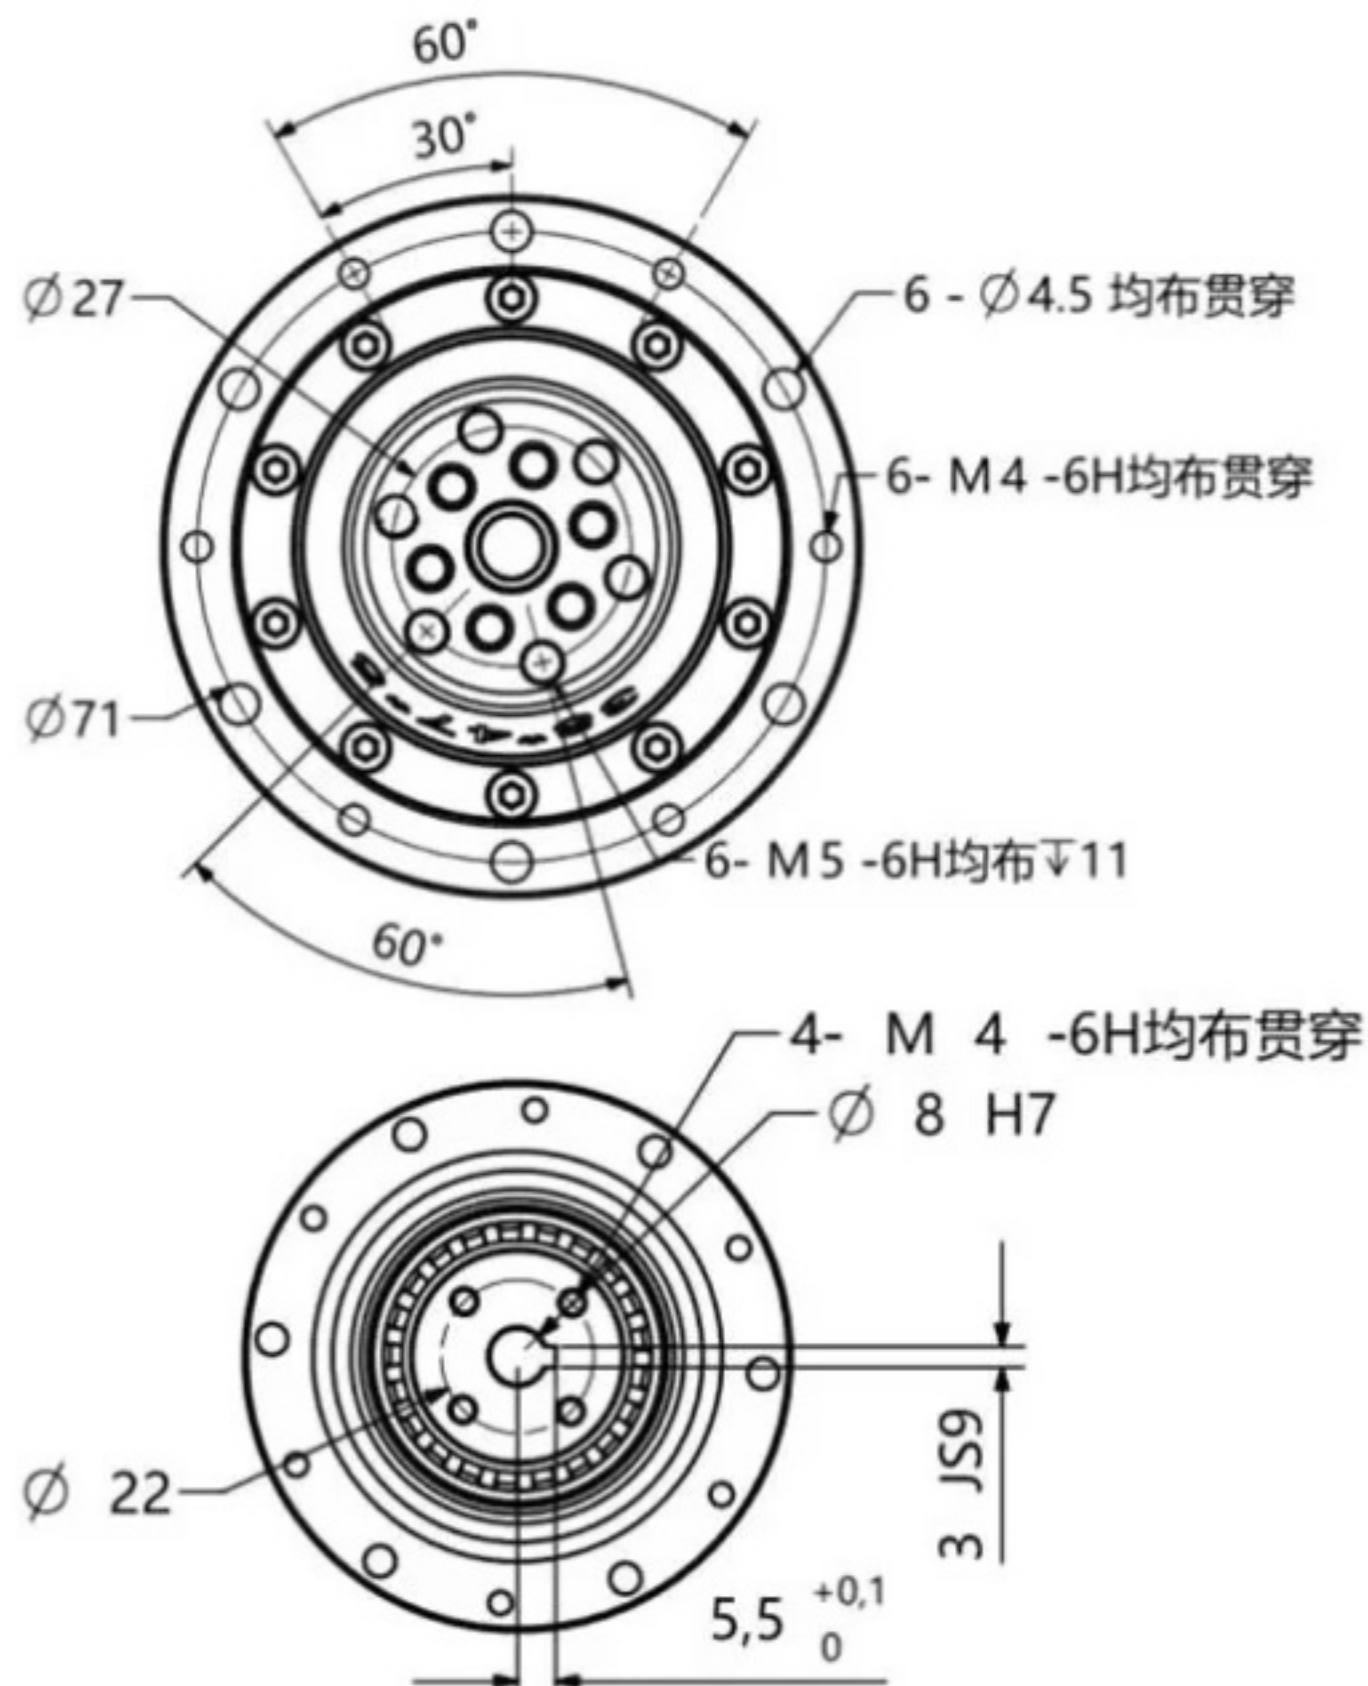

Motor flange mounting plate


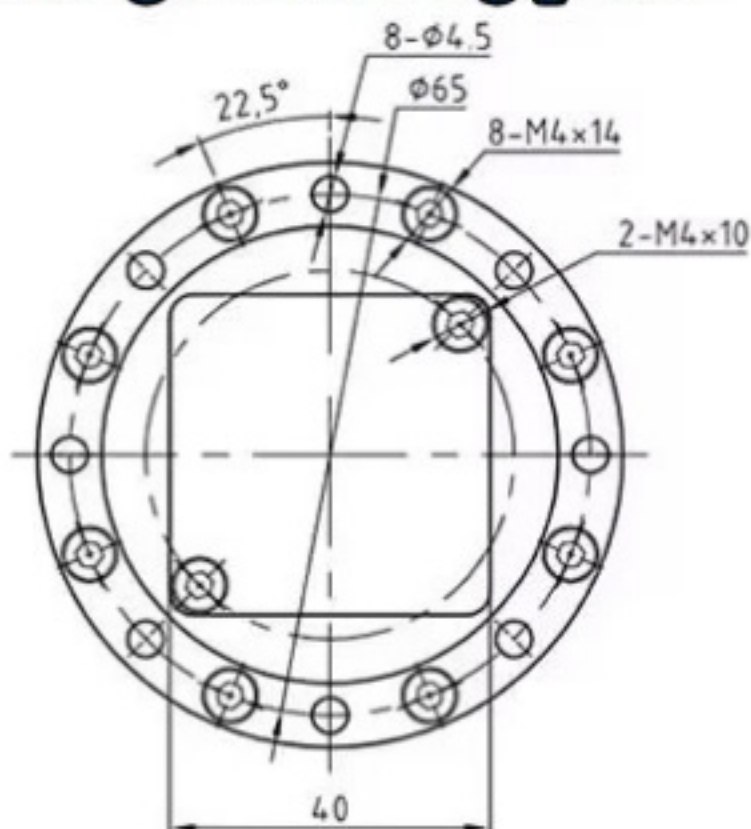


Adapted motor size

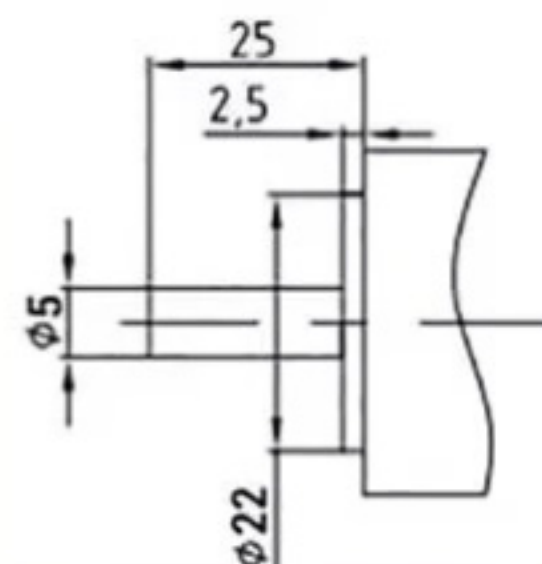


For Nema 17 42mm
Flange Stepper Motor


ZXS20 Harmonic Reducer

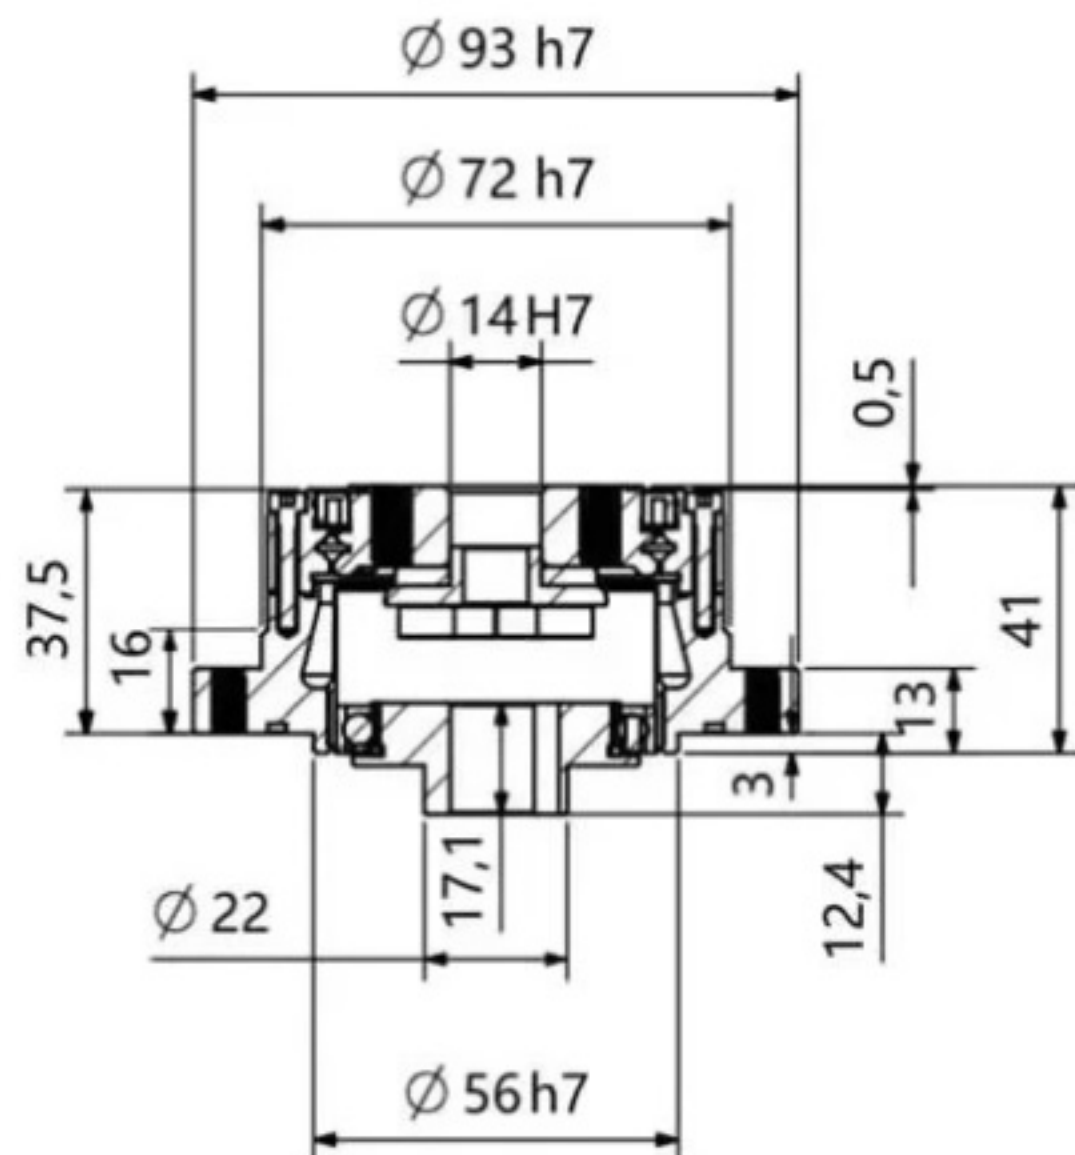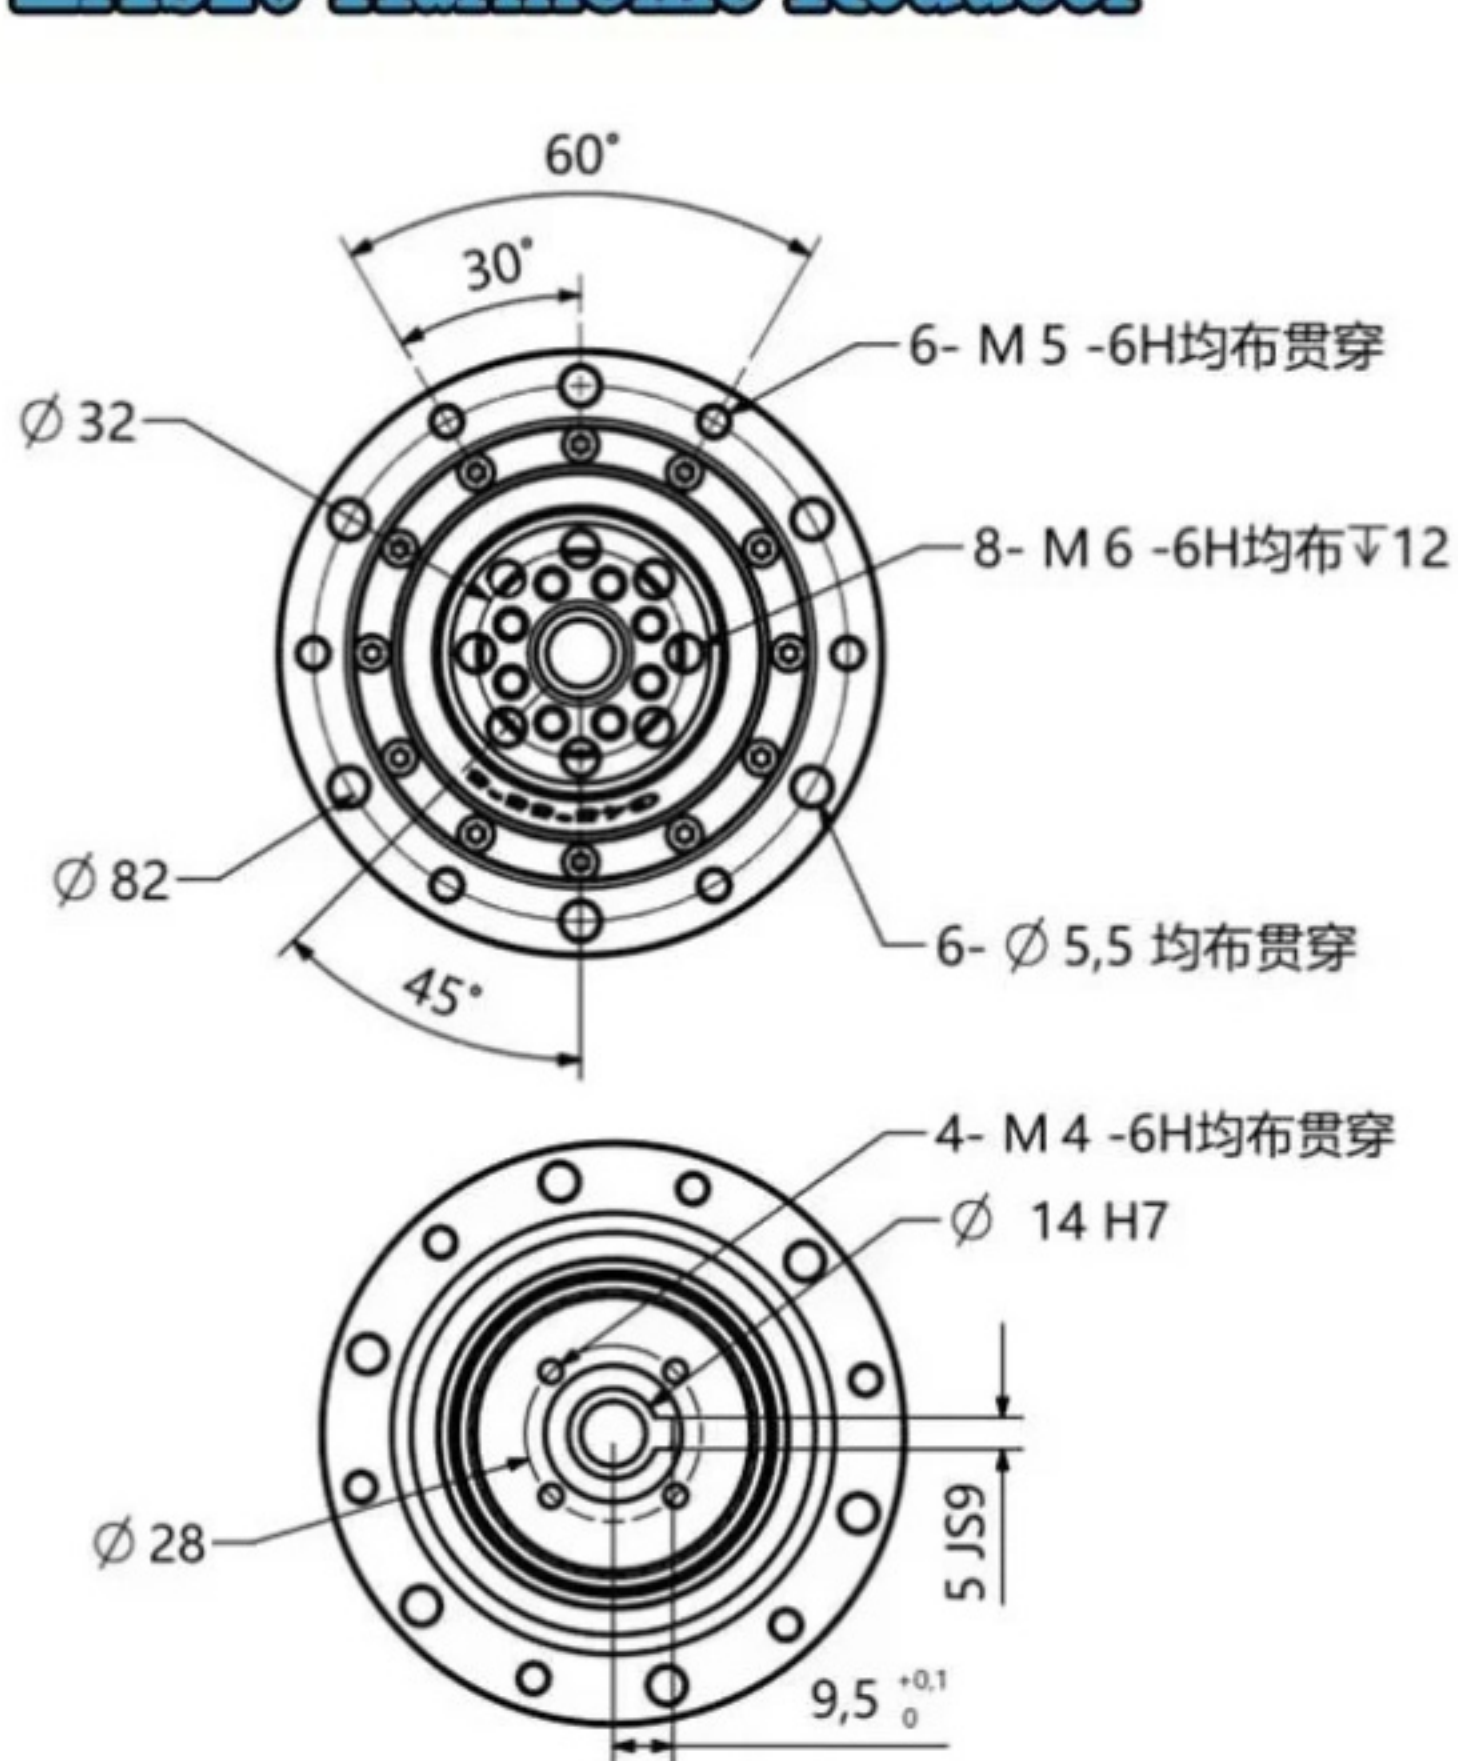

Motor flange mounting plate


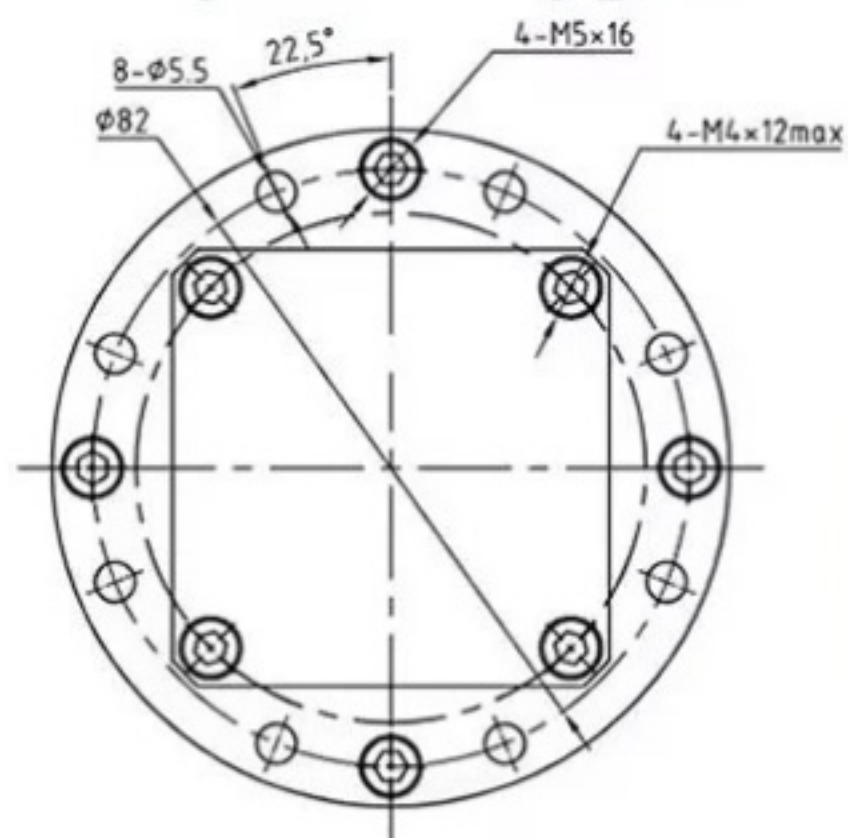


Adapted motor size

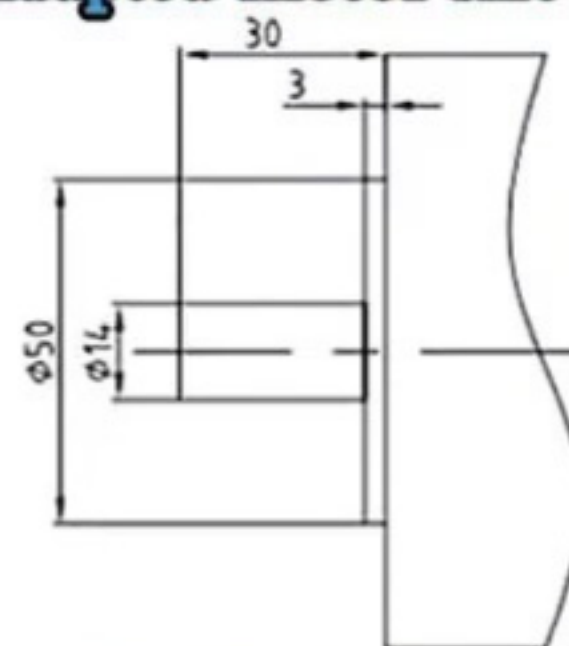


For 60mm Flange
Servo Motor


ZXS20 Harmonic Reducer

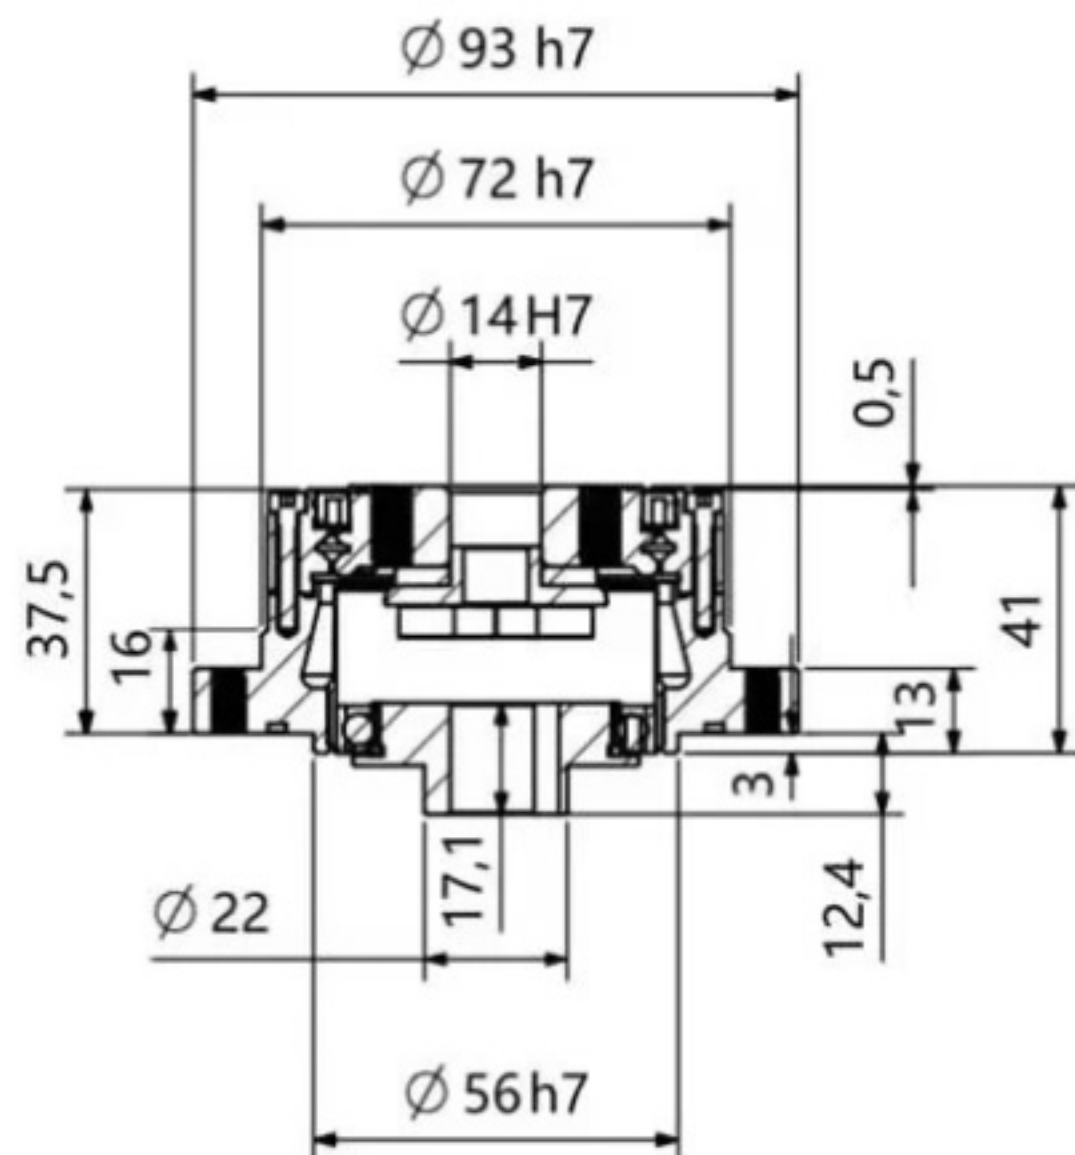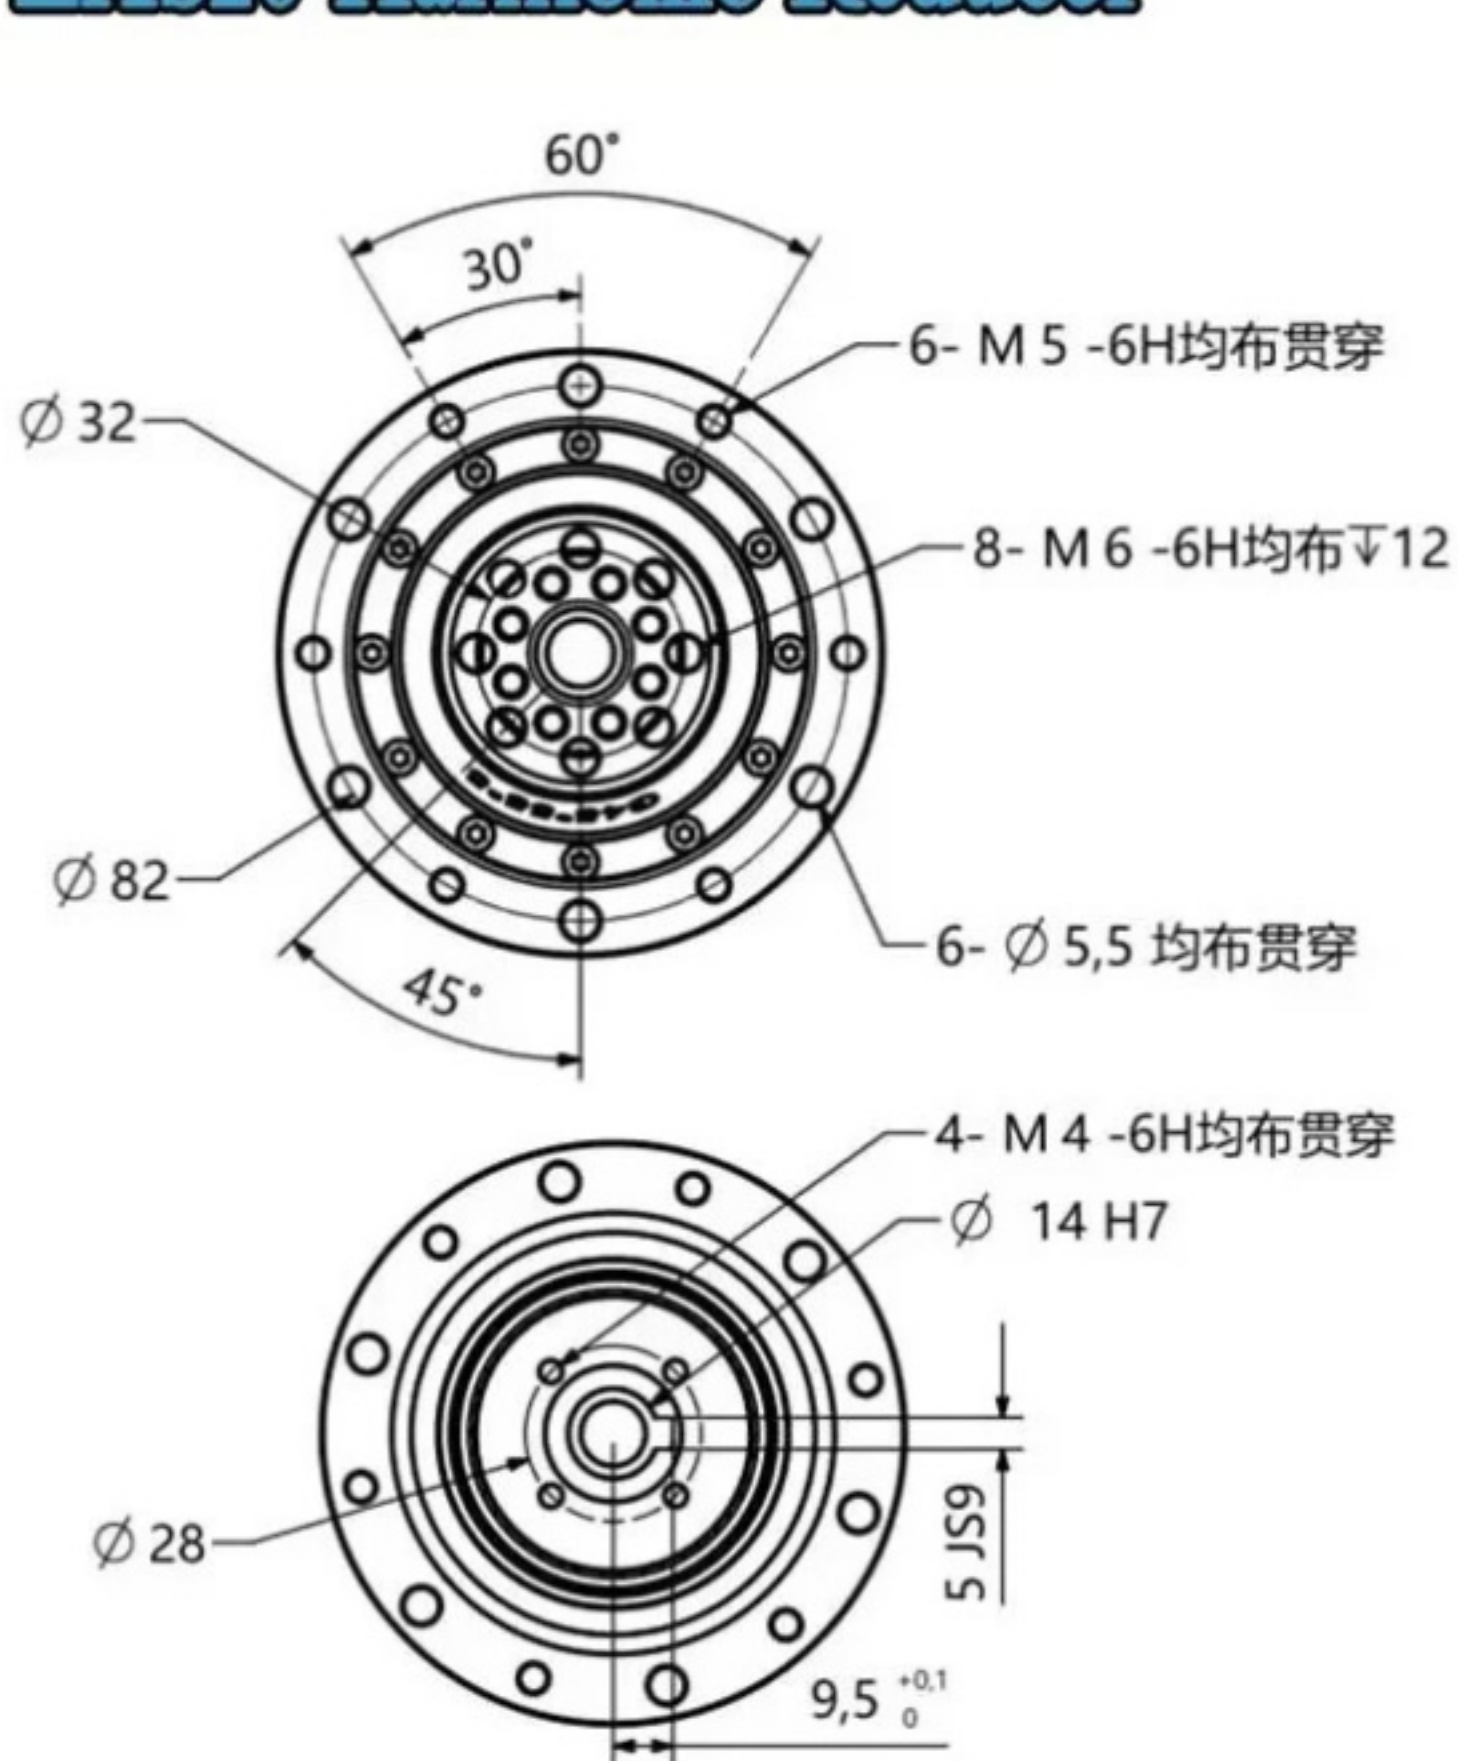

Motor flange mounting plate


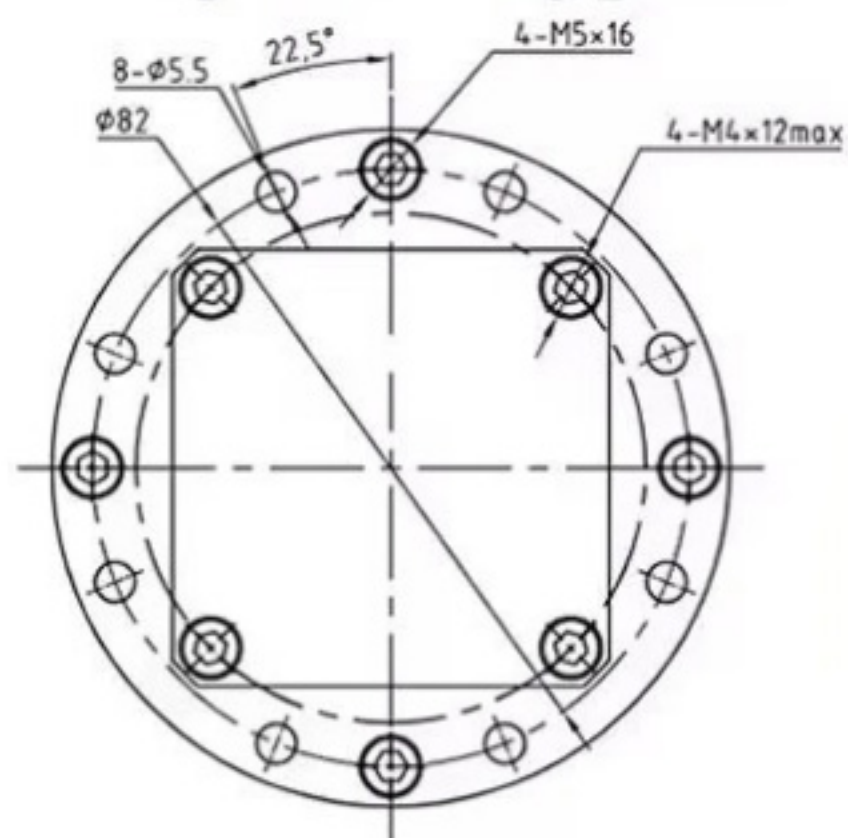


Adapted motor size

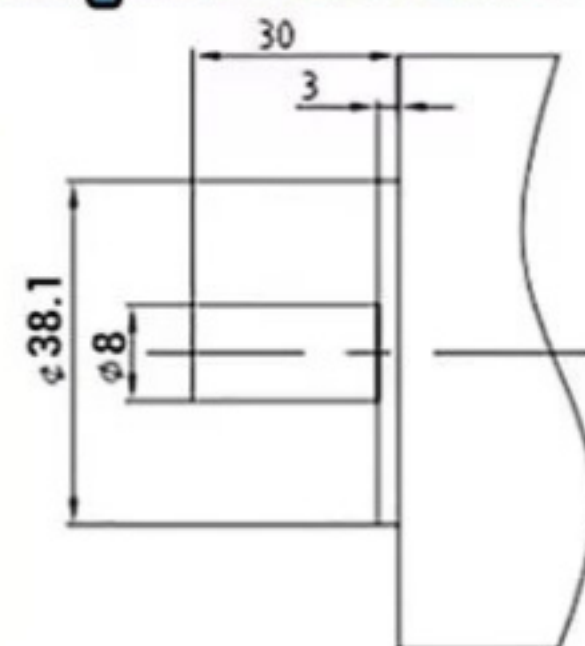


For Nema 23 57mm
Flange Stepper Motor


ZXS25 Harmonic Reducer

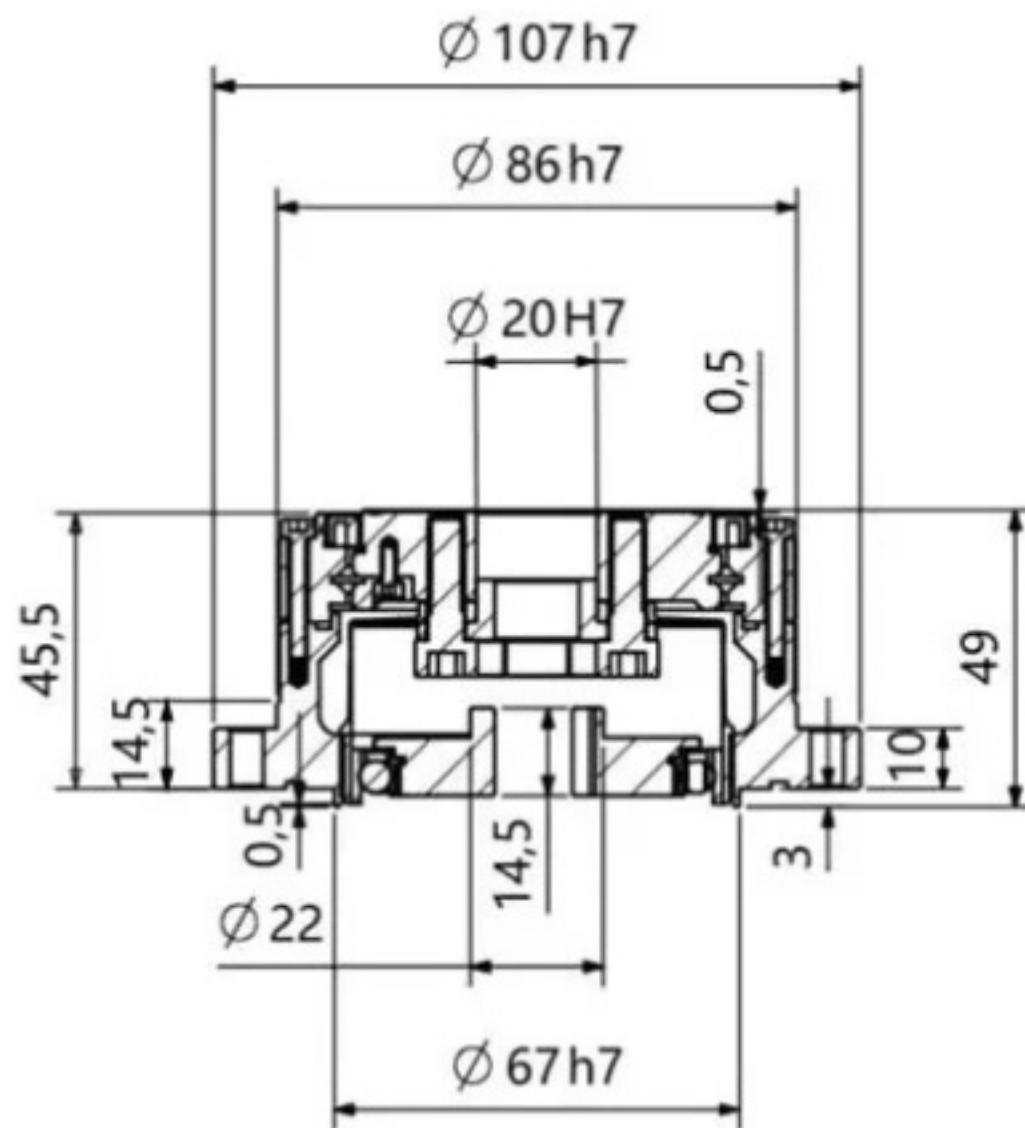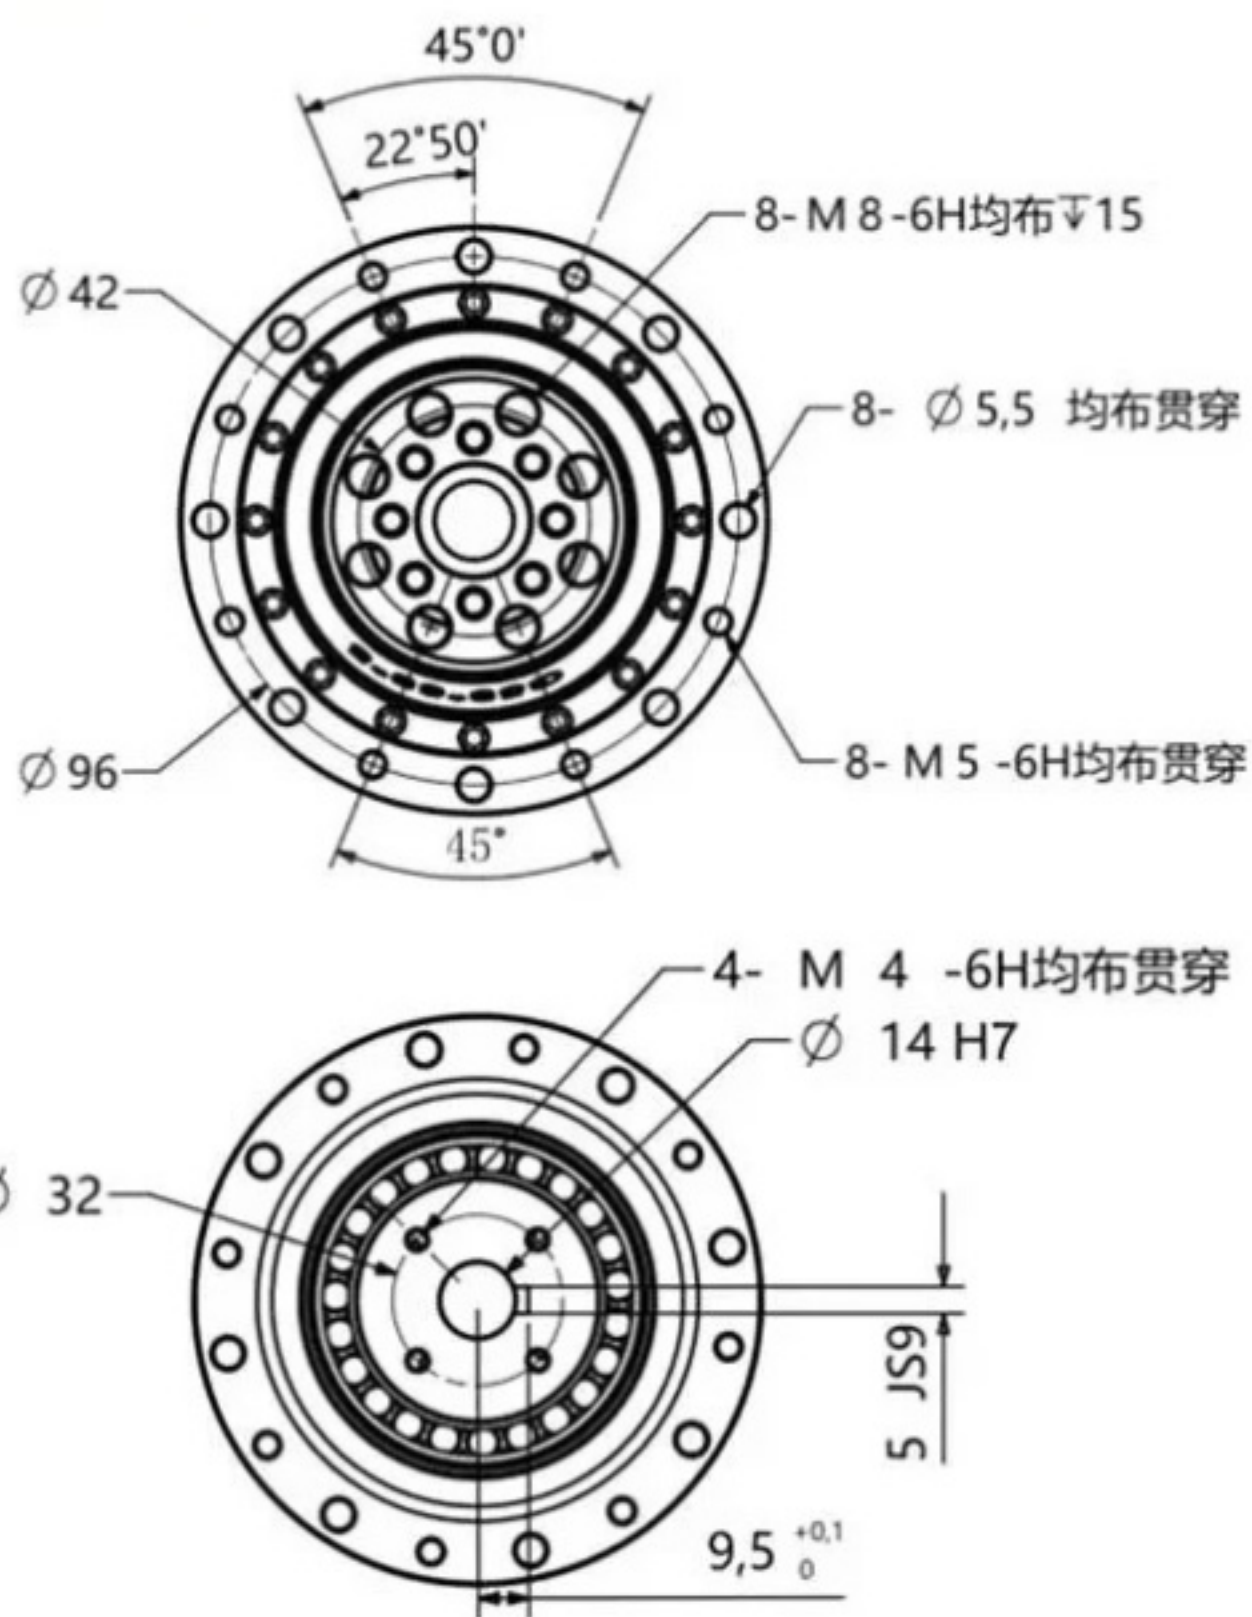

Motor flange mounting plate


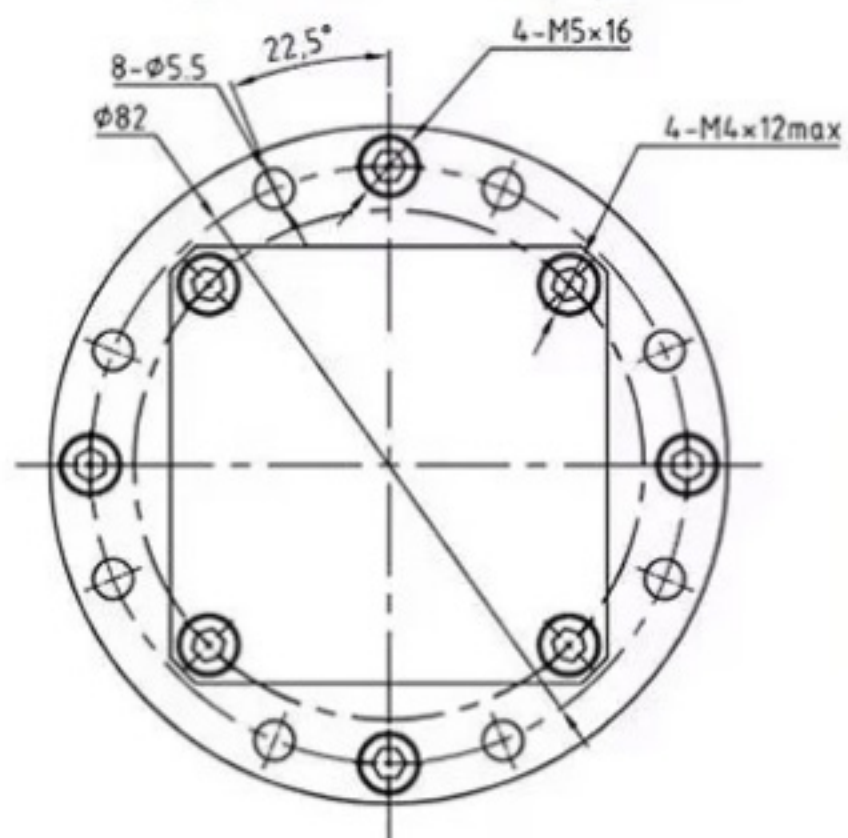


Adapted motor size

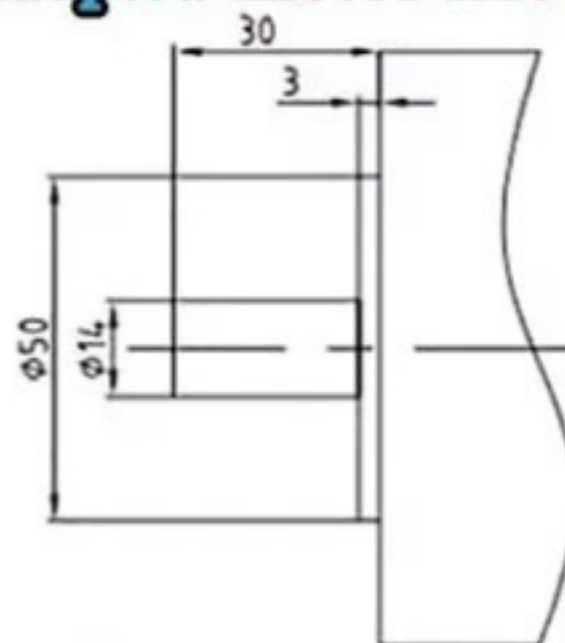


For 60mm Flange Servo Motor


ZXS25 Harmonic Reducer

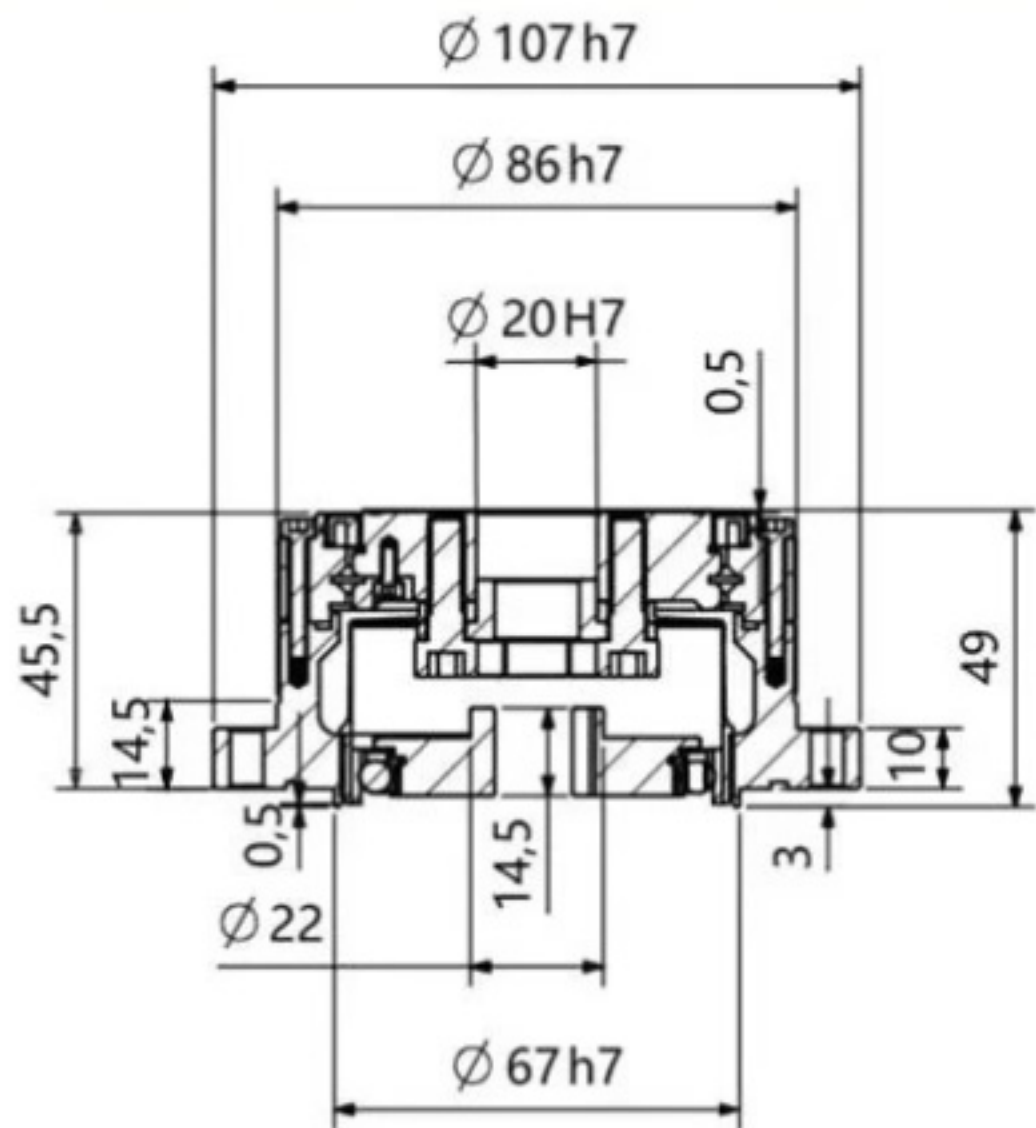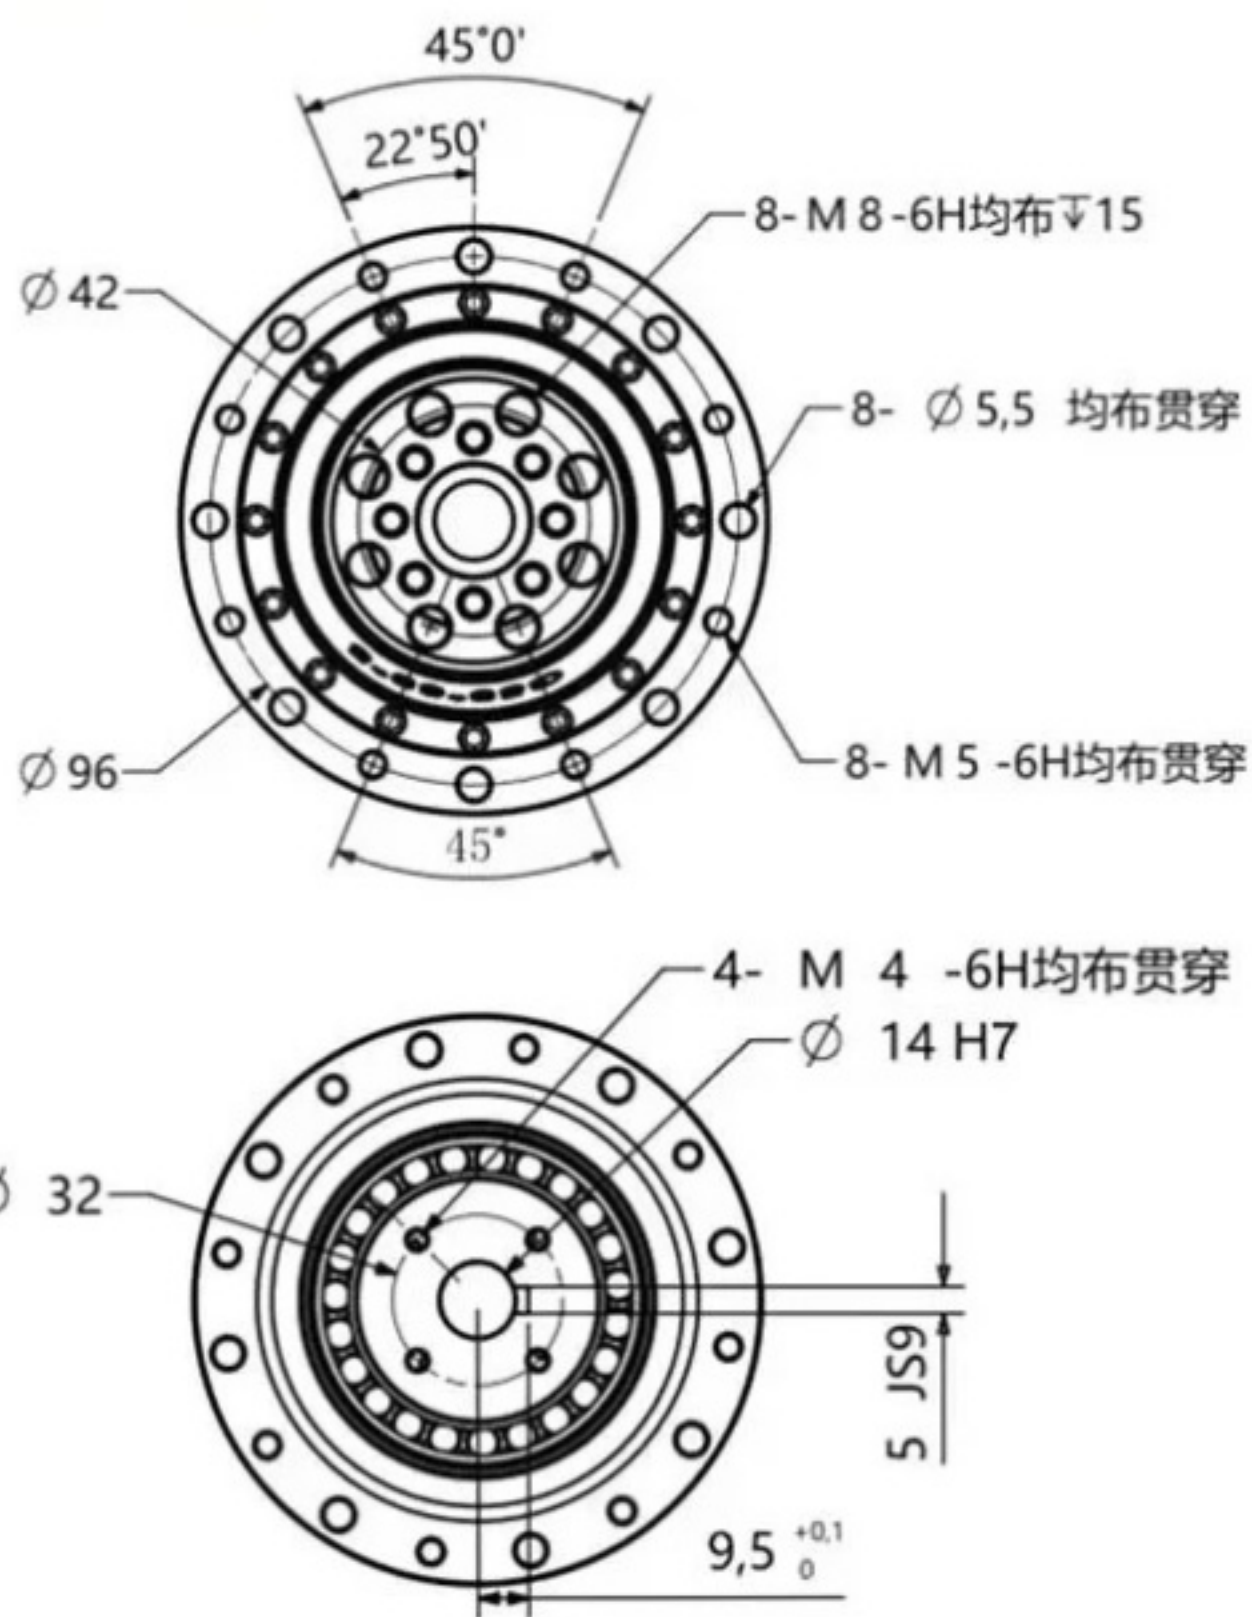

Motor flange mounting plate


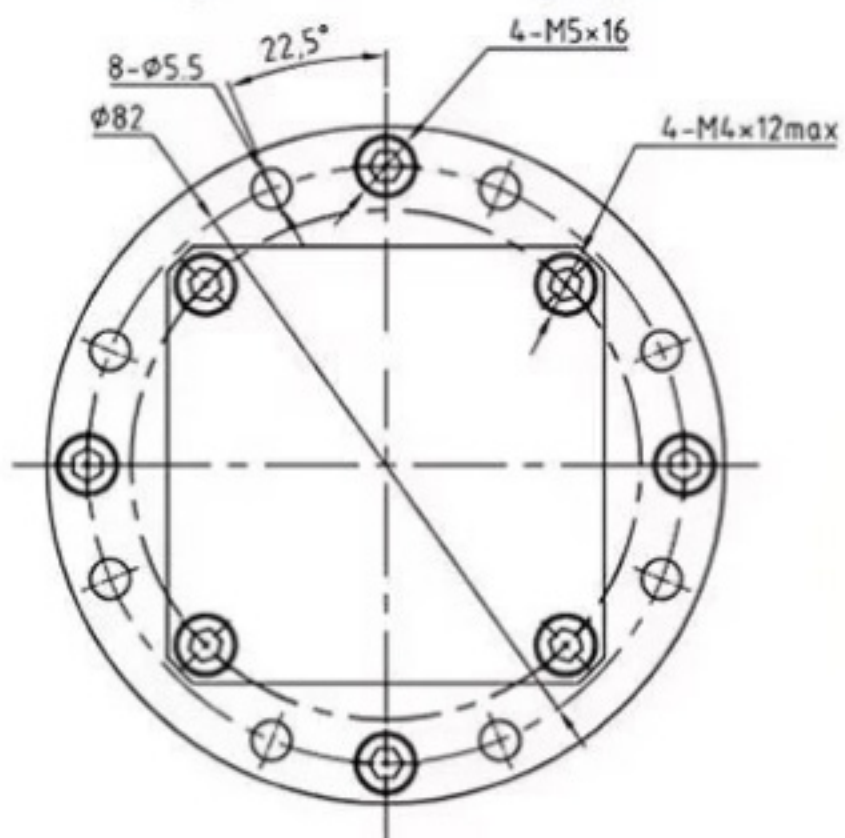


Adapted motor size

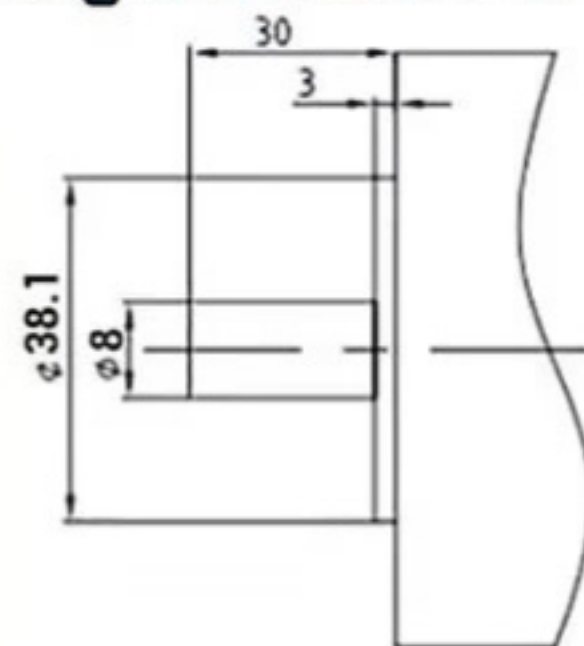


**For Nema 23 57mm
Flange Stepper Motor**


ZXS32 Harmonic Reducer

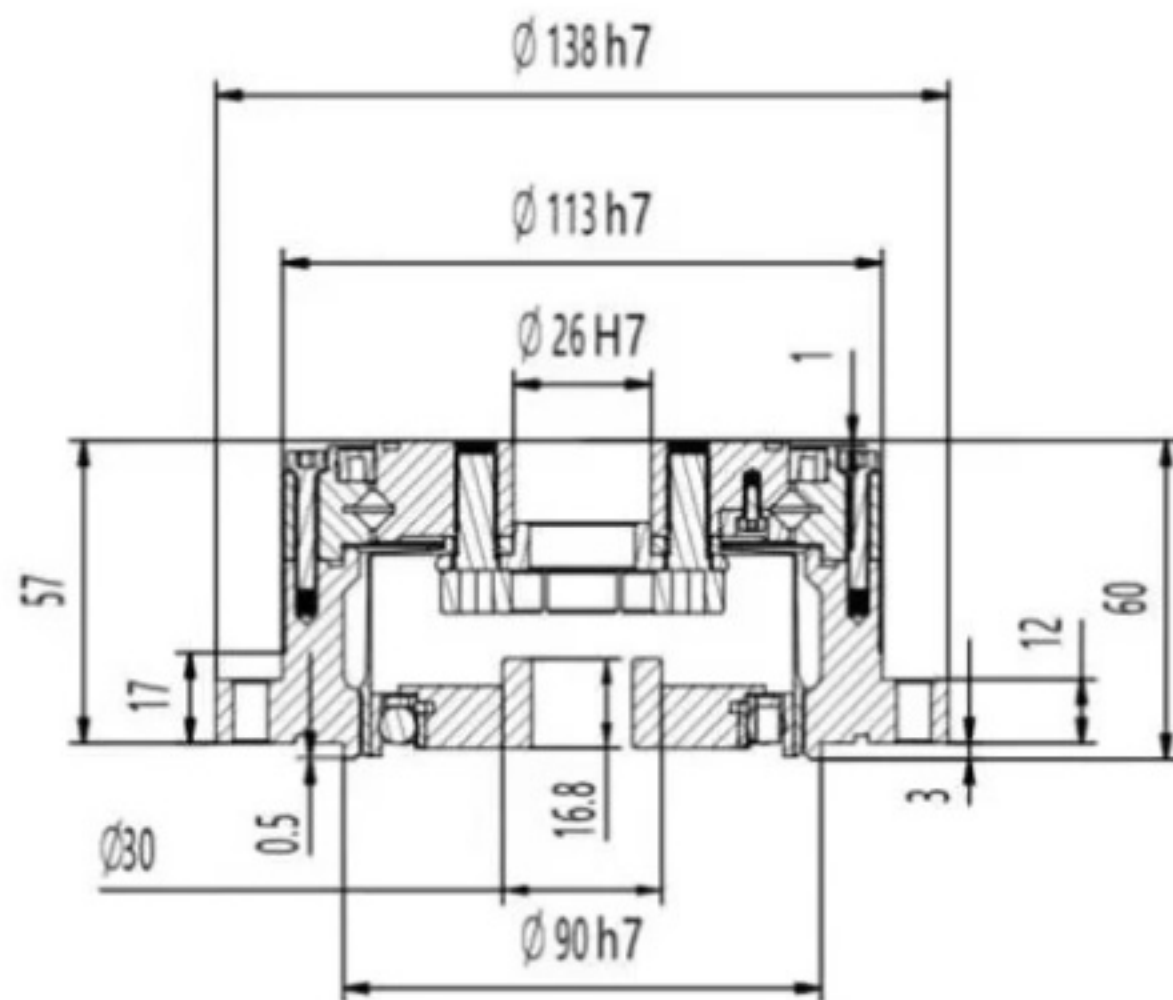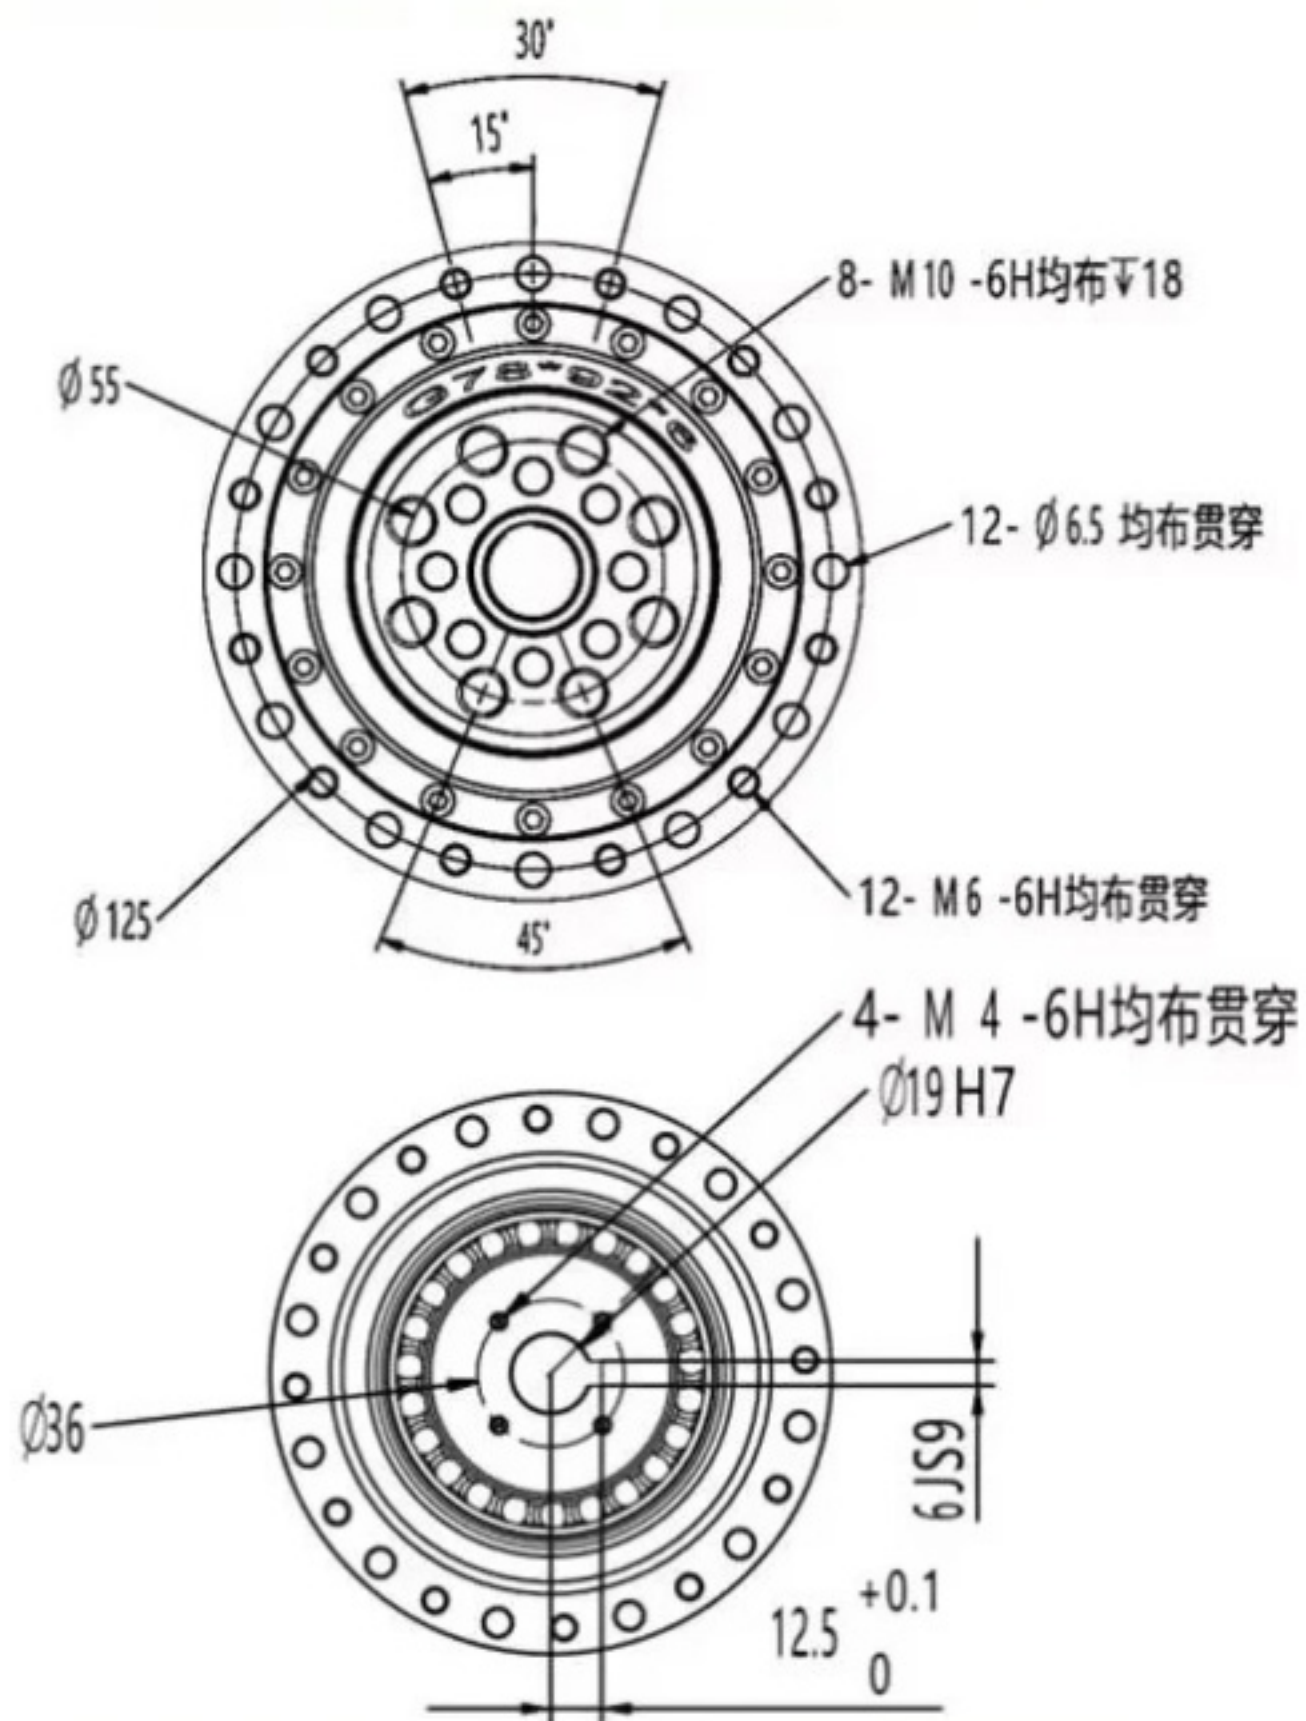

Motor flange mounting plate


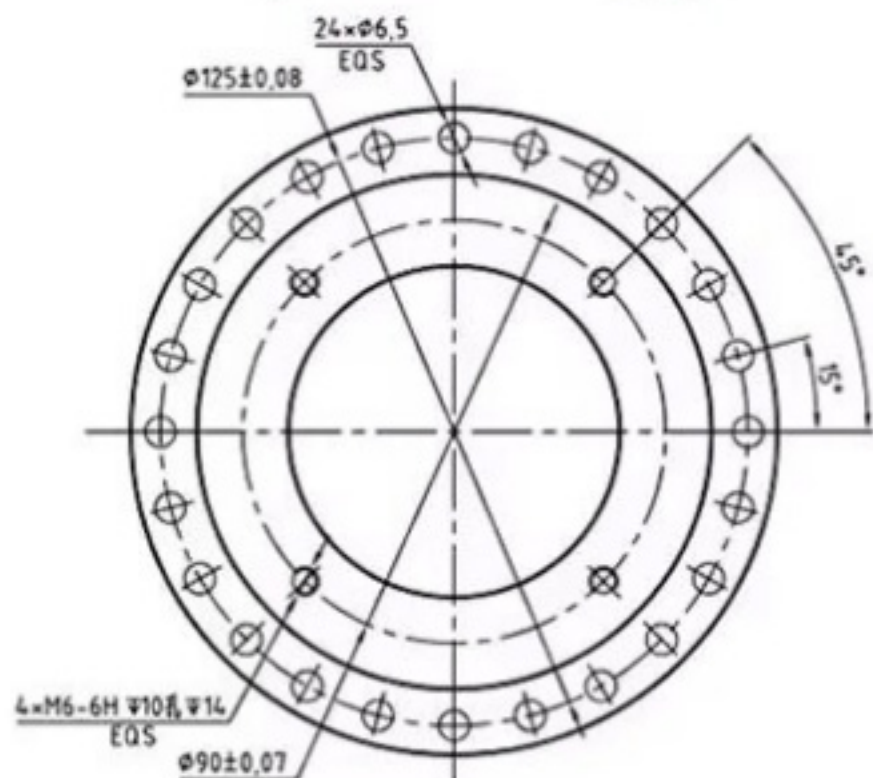


Adapted motor size

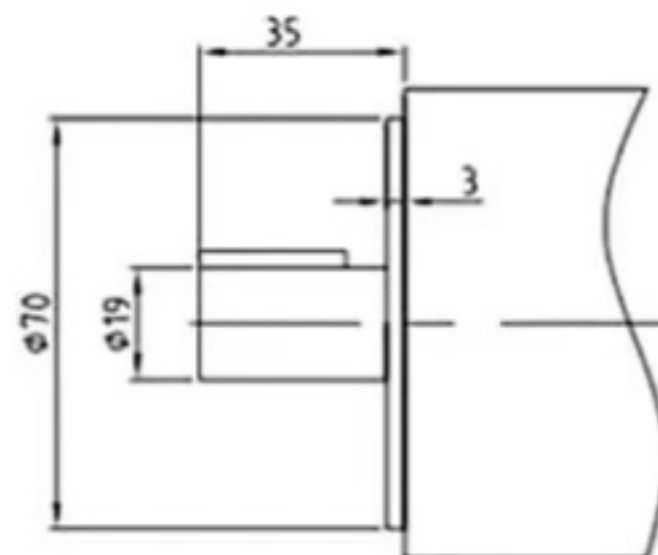


For 80mm Flange Servo Motor



ZXS40 Harmonic Reducer

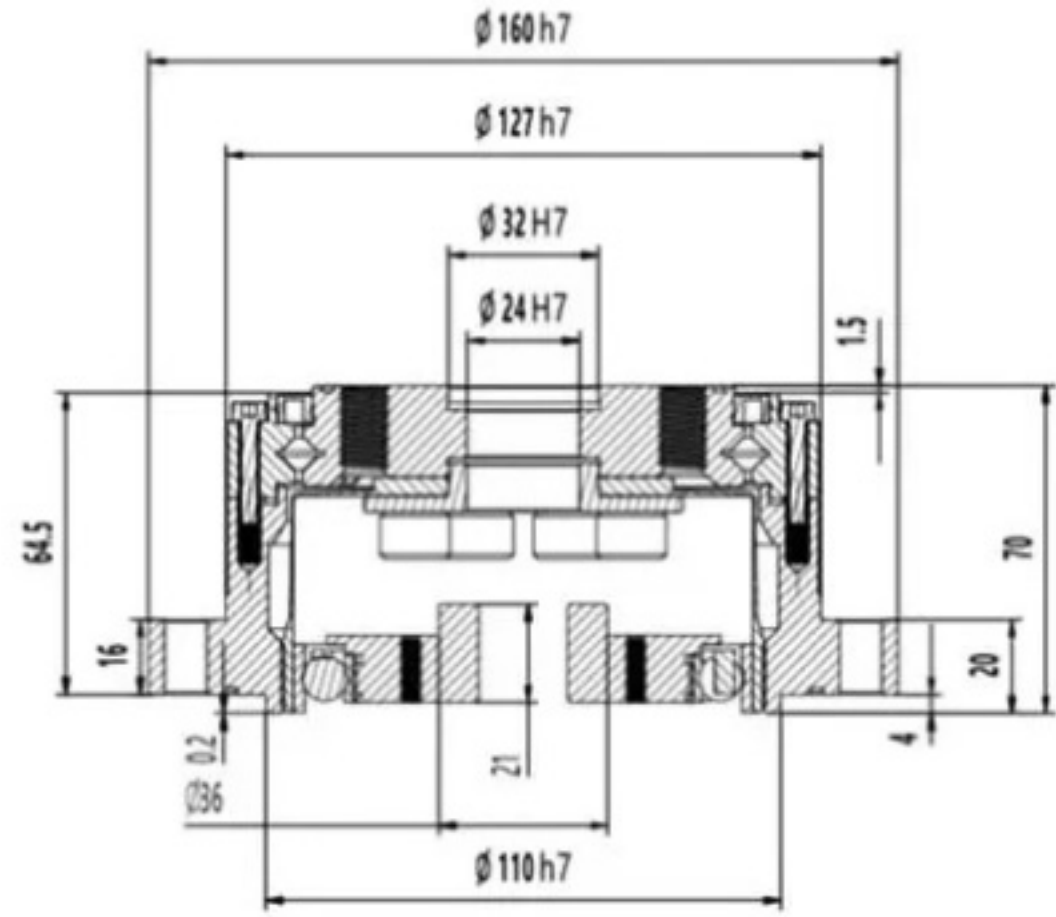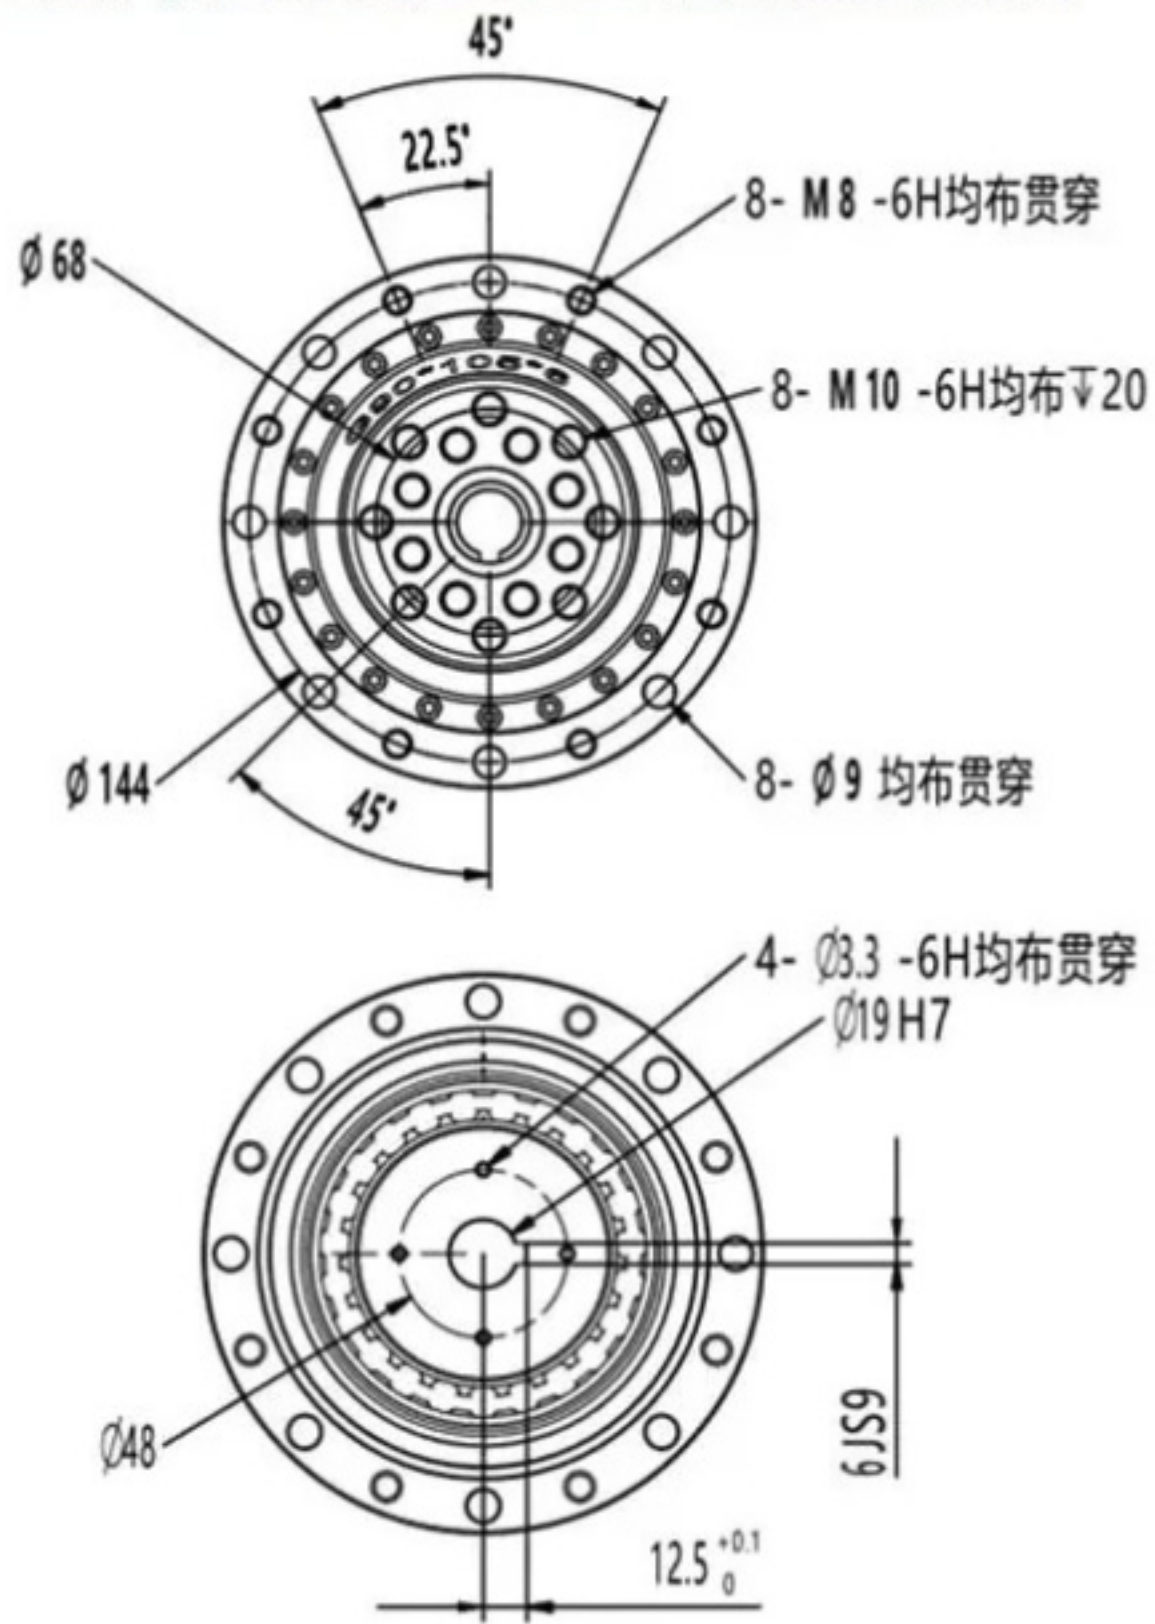


Adapted motor size-19mm Shaft 110mm Flange Servo Motor

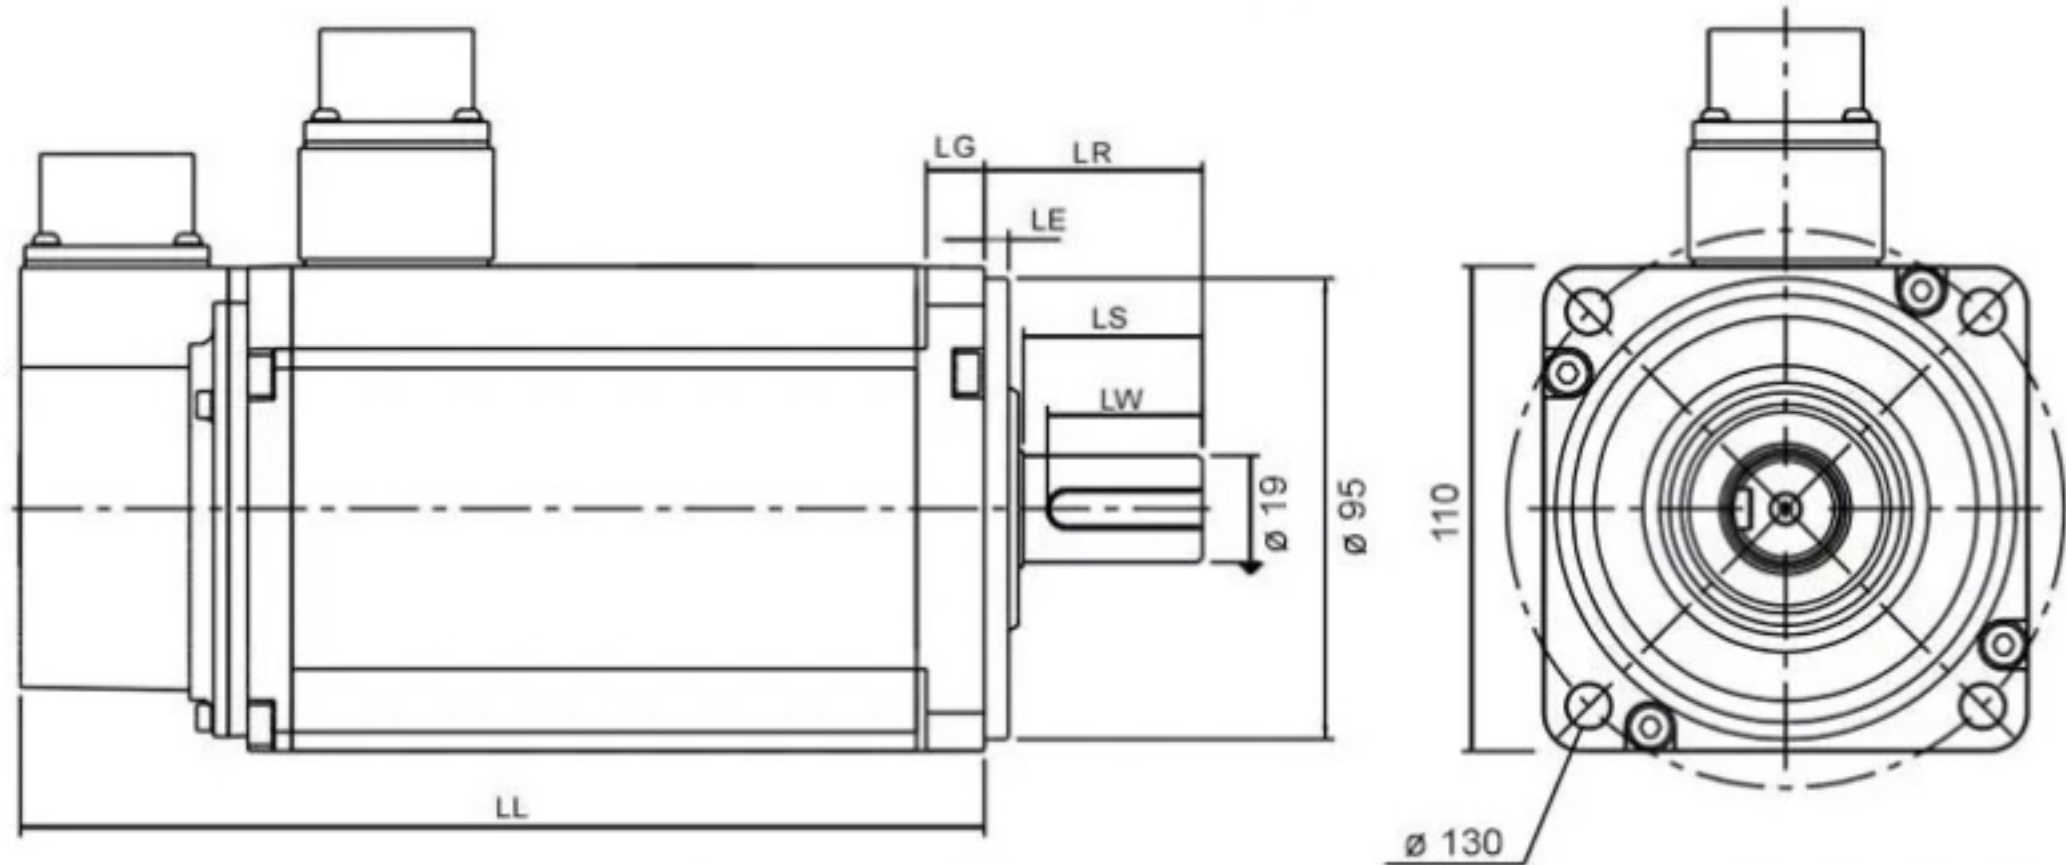


ZXS40 Harmonic Reducer

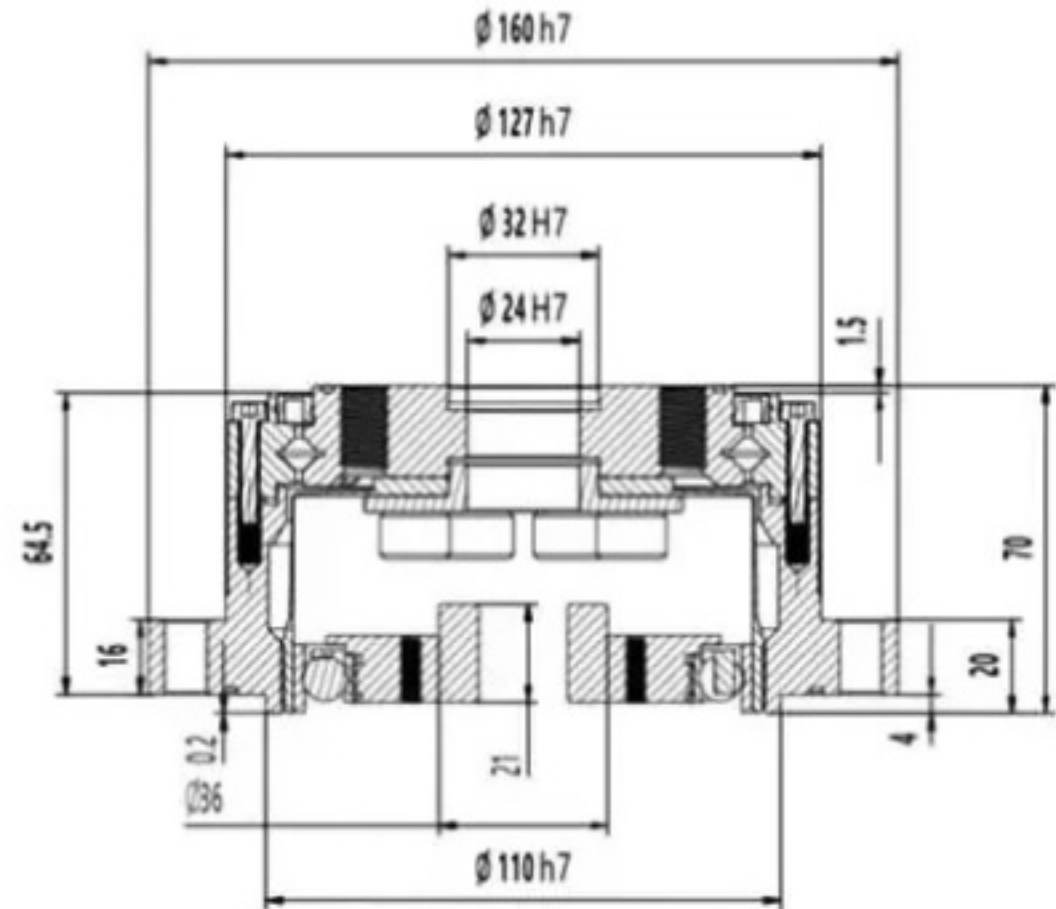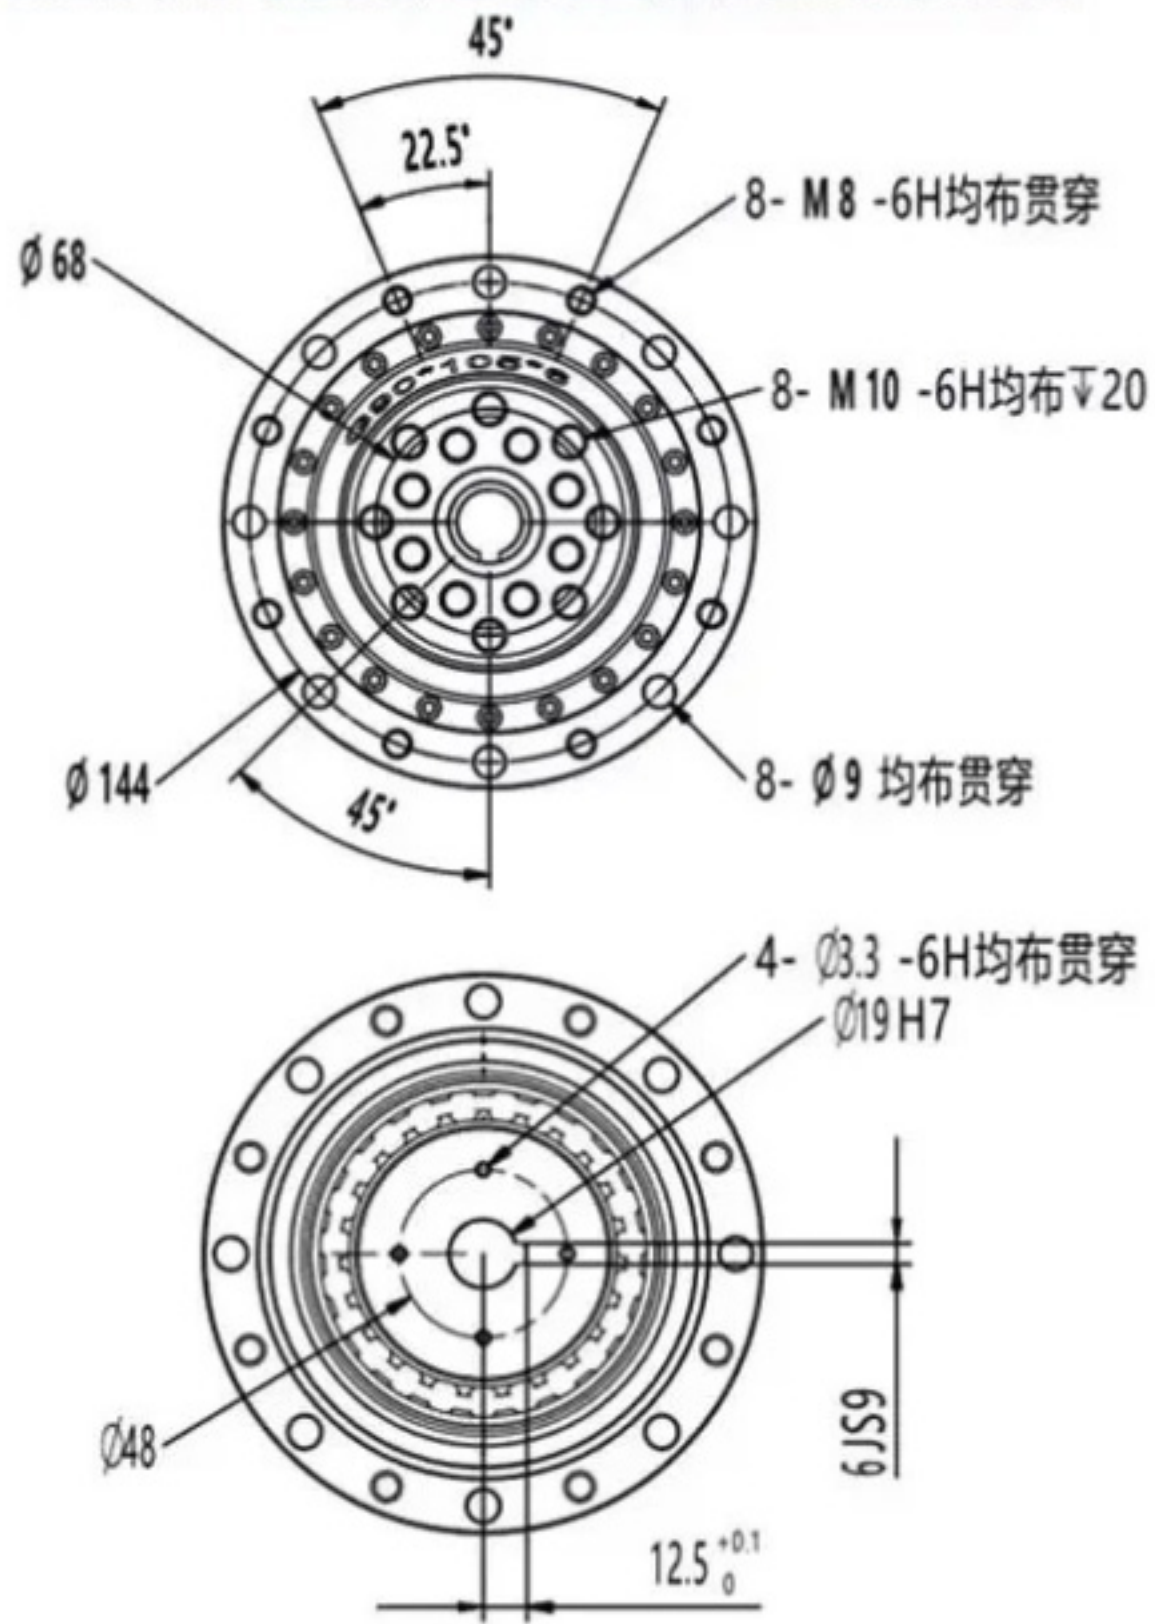


Adapted motor size—22mm Shaft 130mm Flange Servo Motor

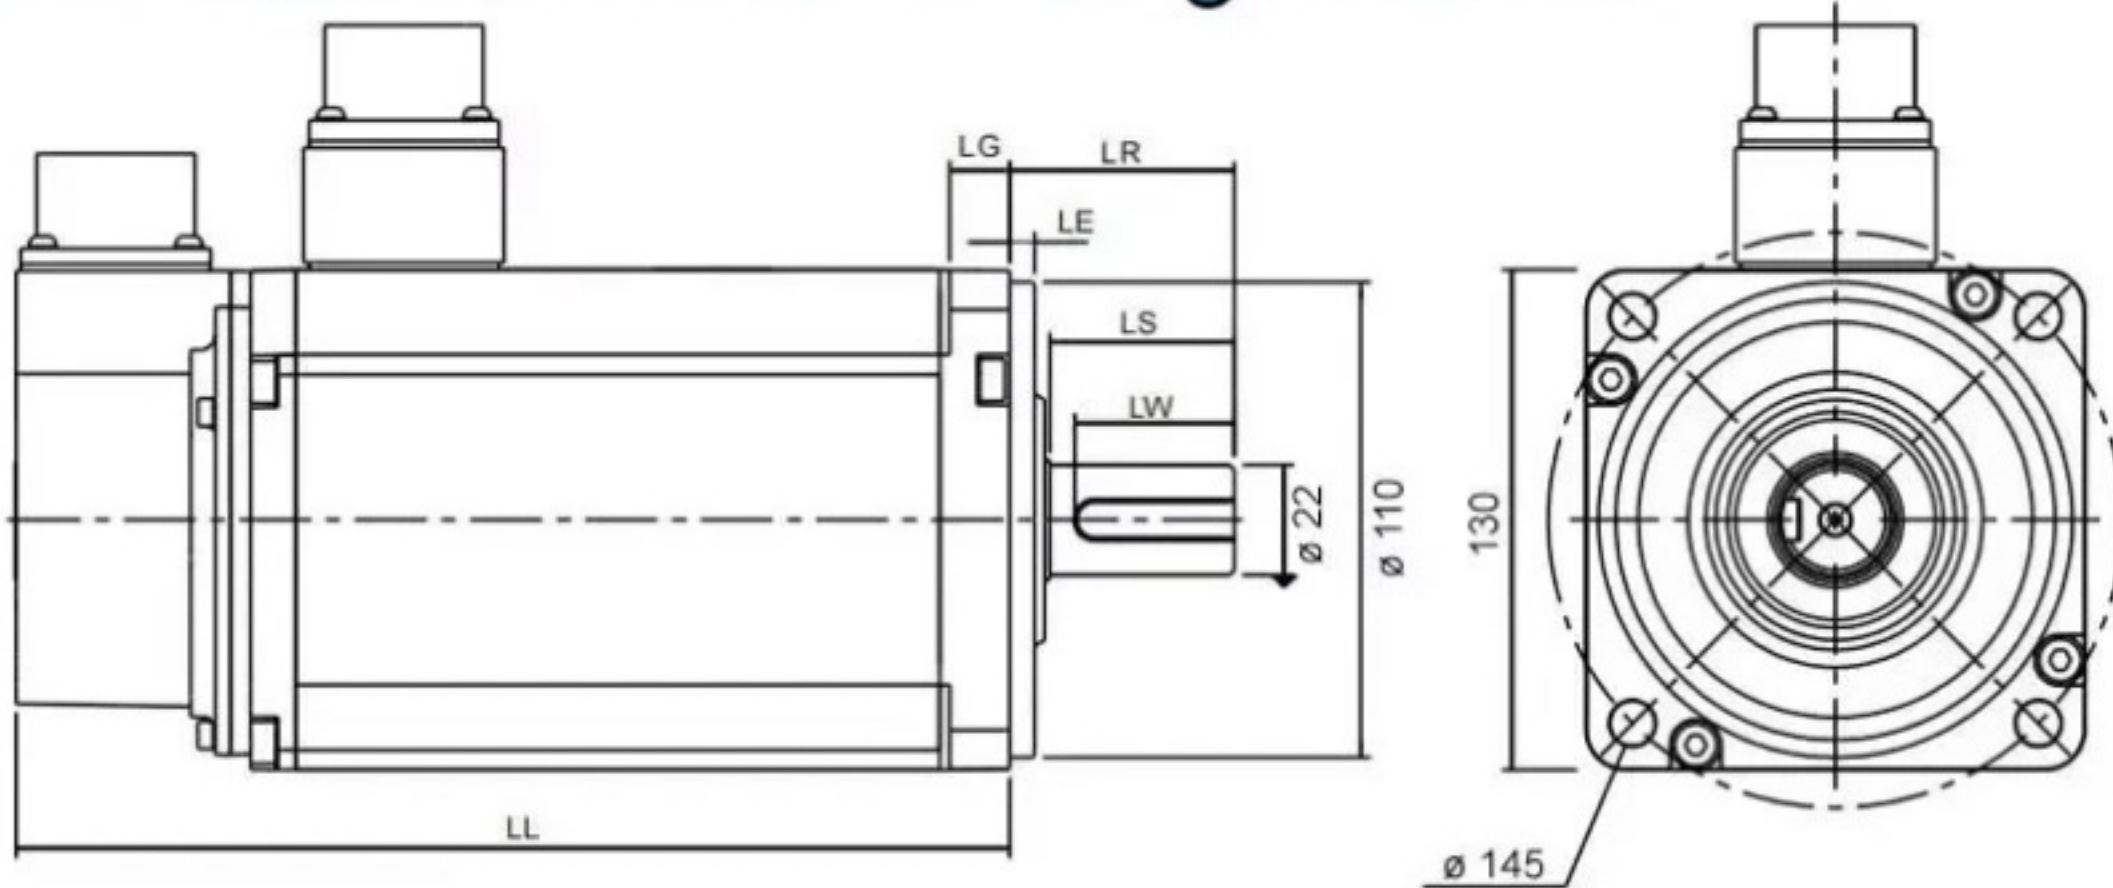



ZXS45 Harmonic Reducer

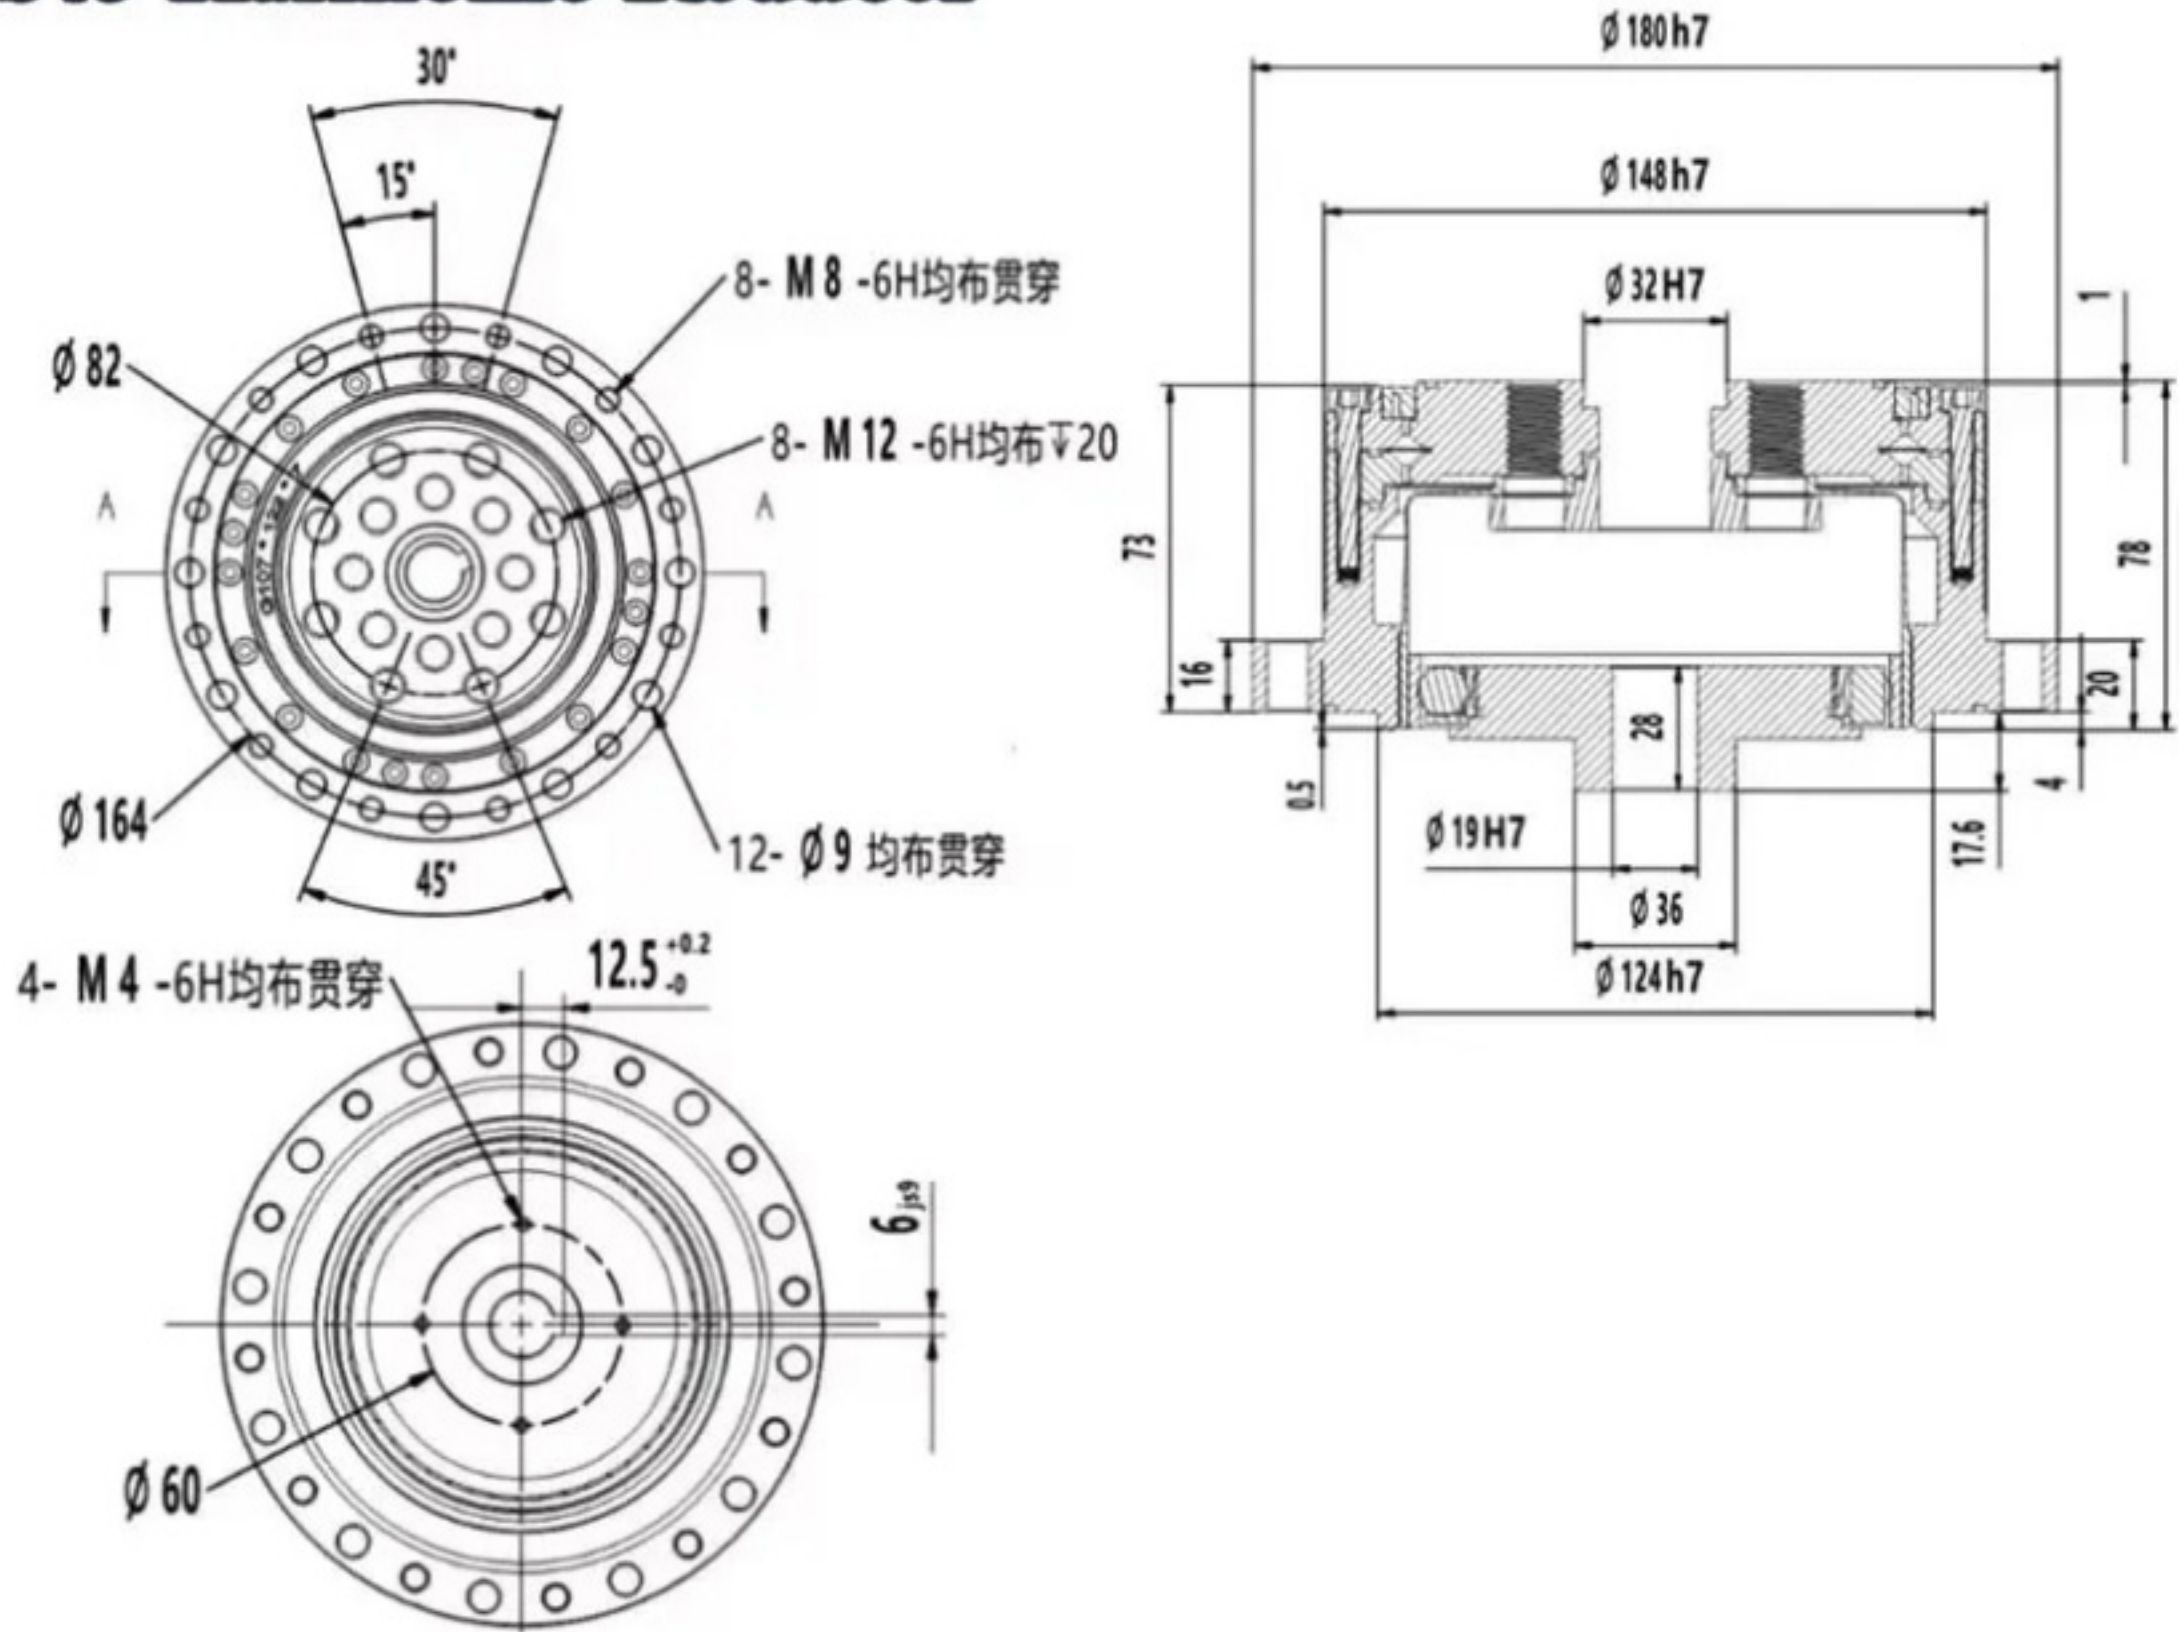


Adapted motor size-19mm Shaft 110mm Flange Servo Motor

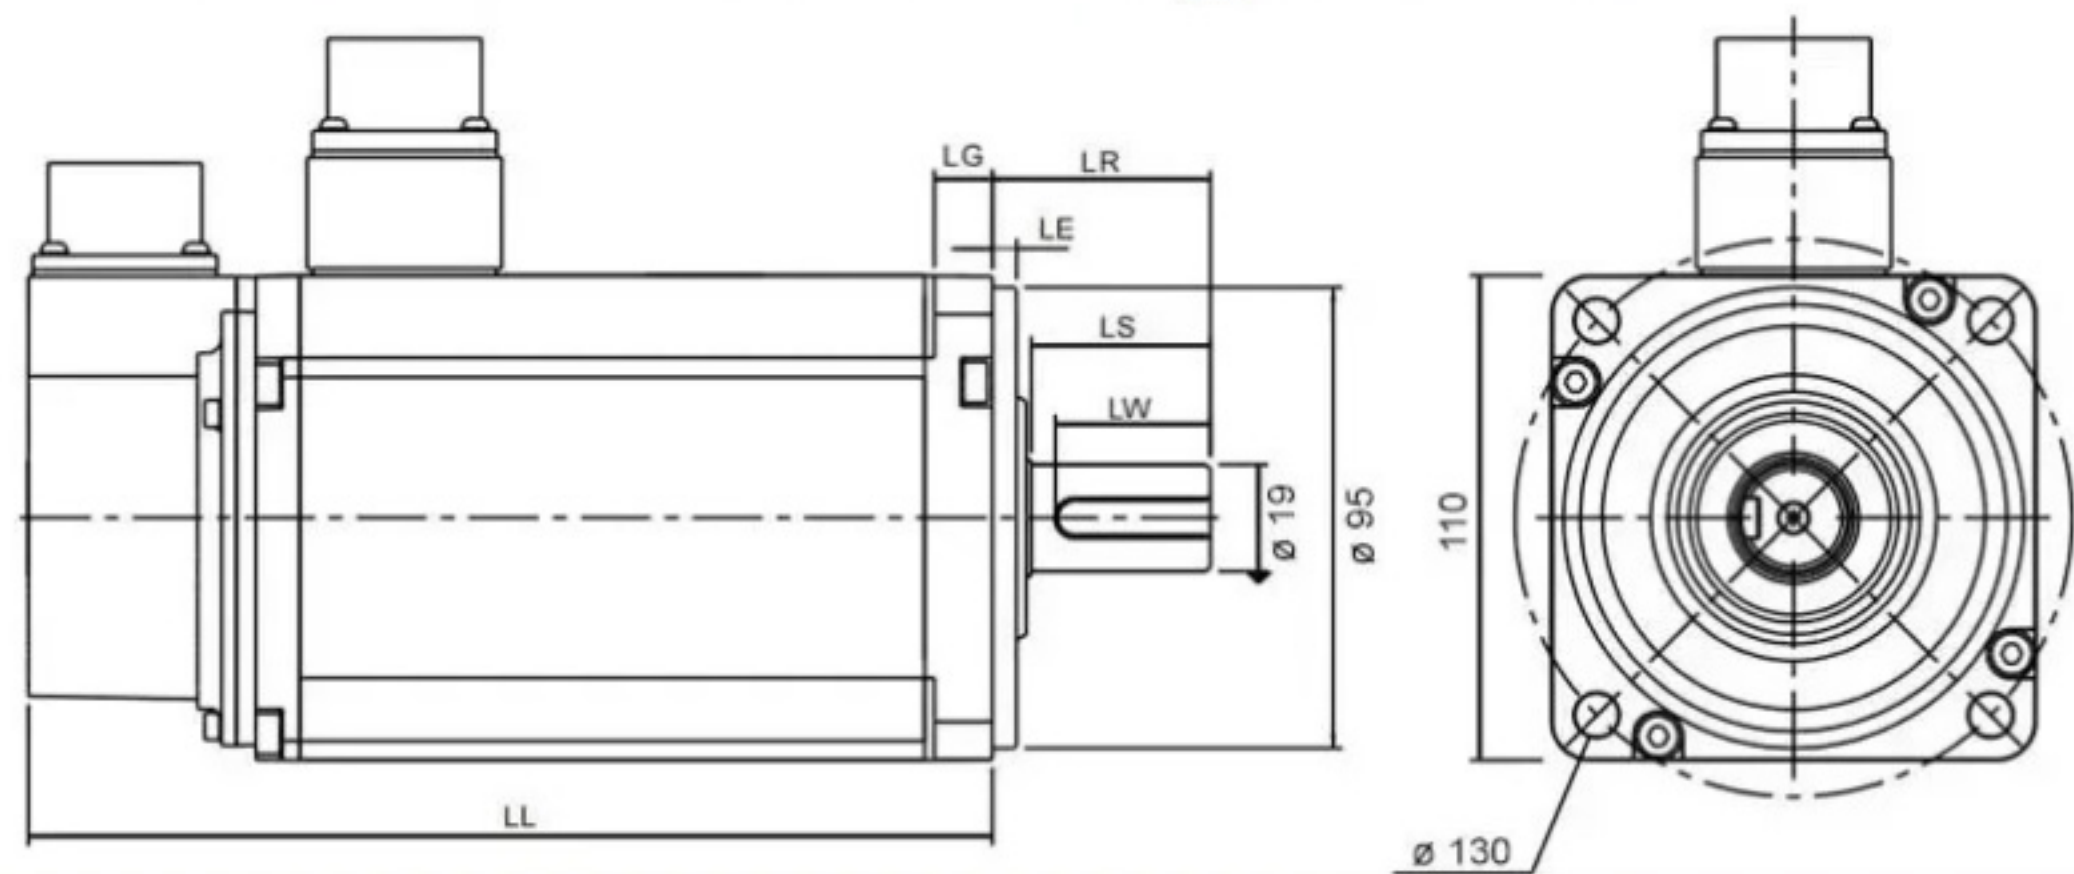




ZXS50 Harmonic Reducer

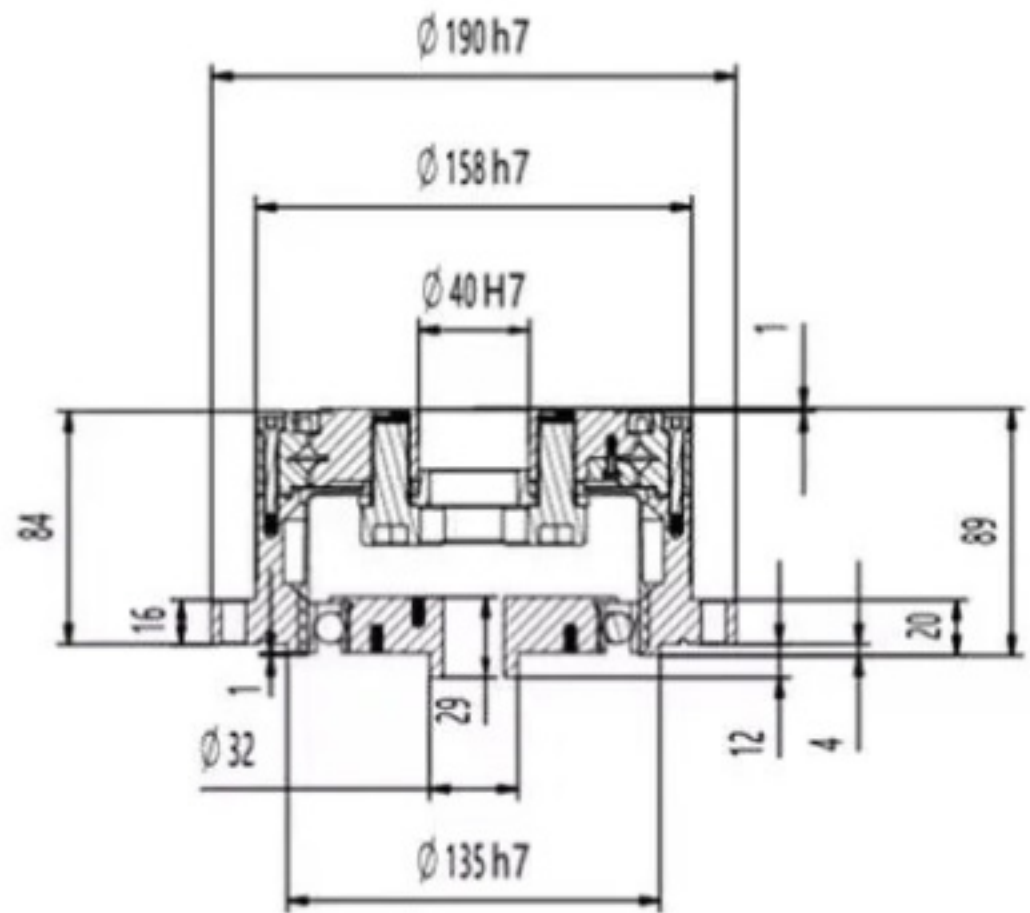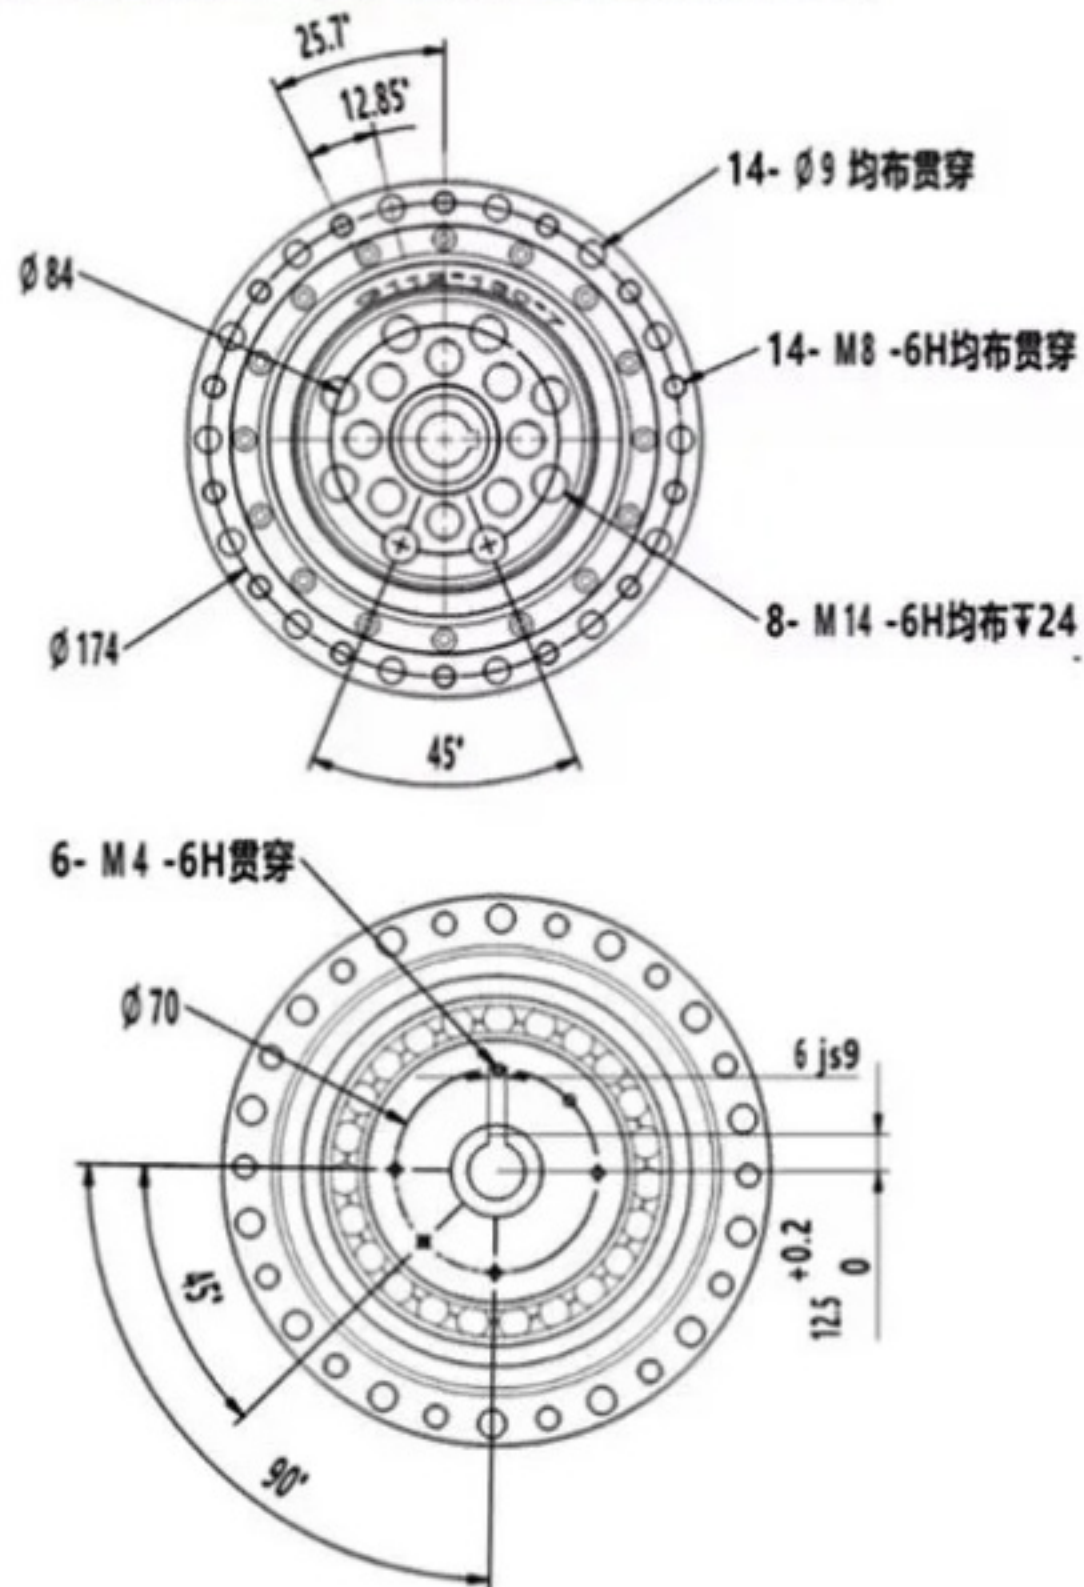



Adapted motor size-19mm Shaft 110mm Flange Servo Motor

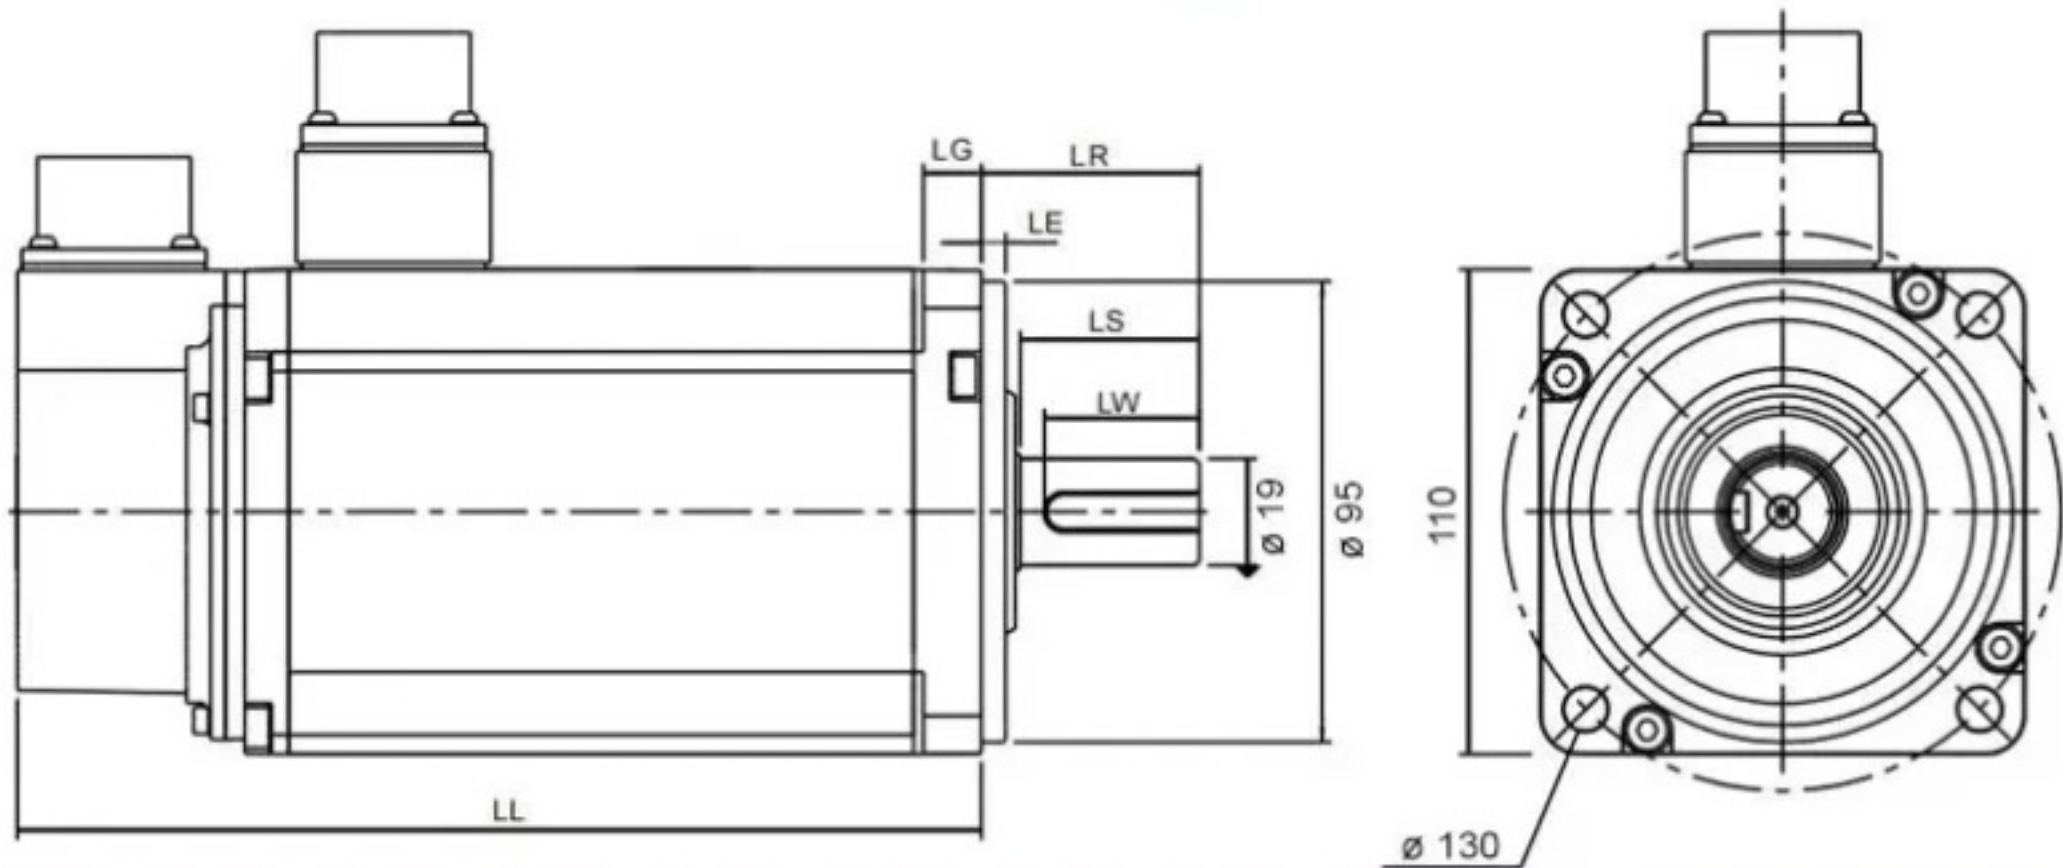



ZXS58 Harmonic Reducer

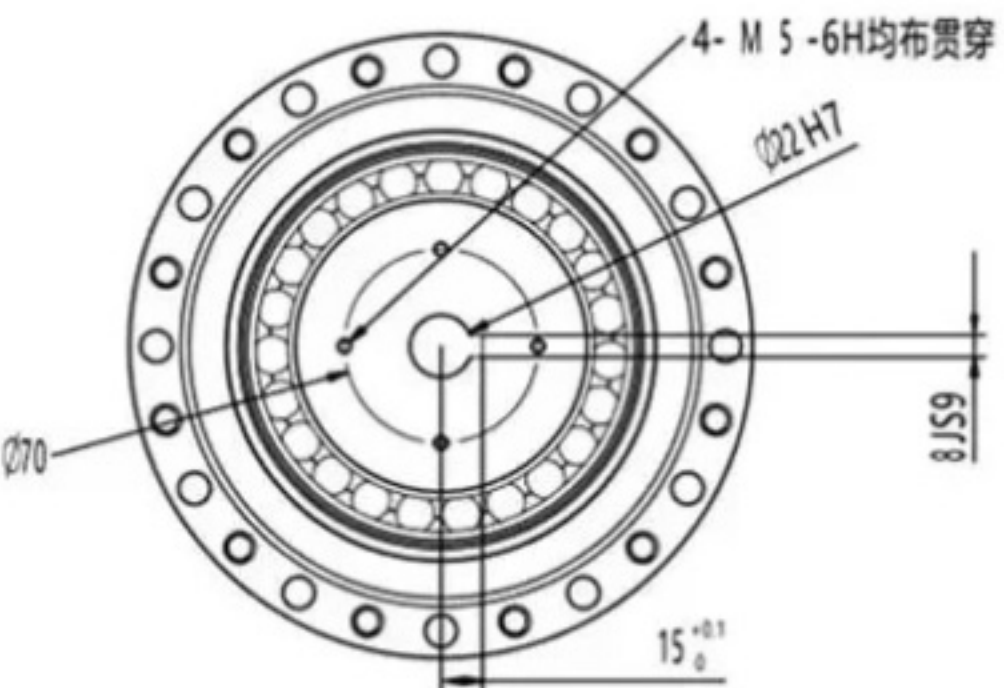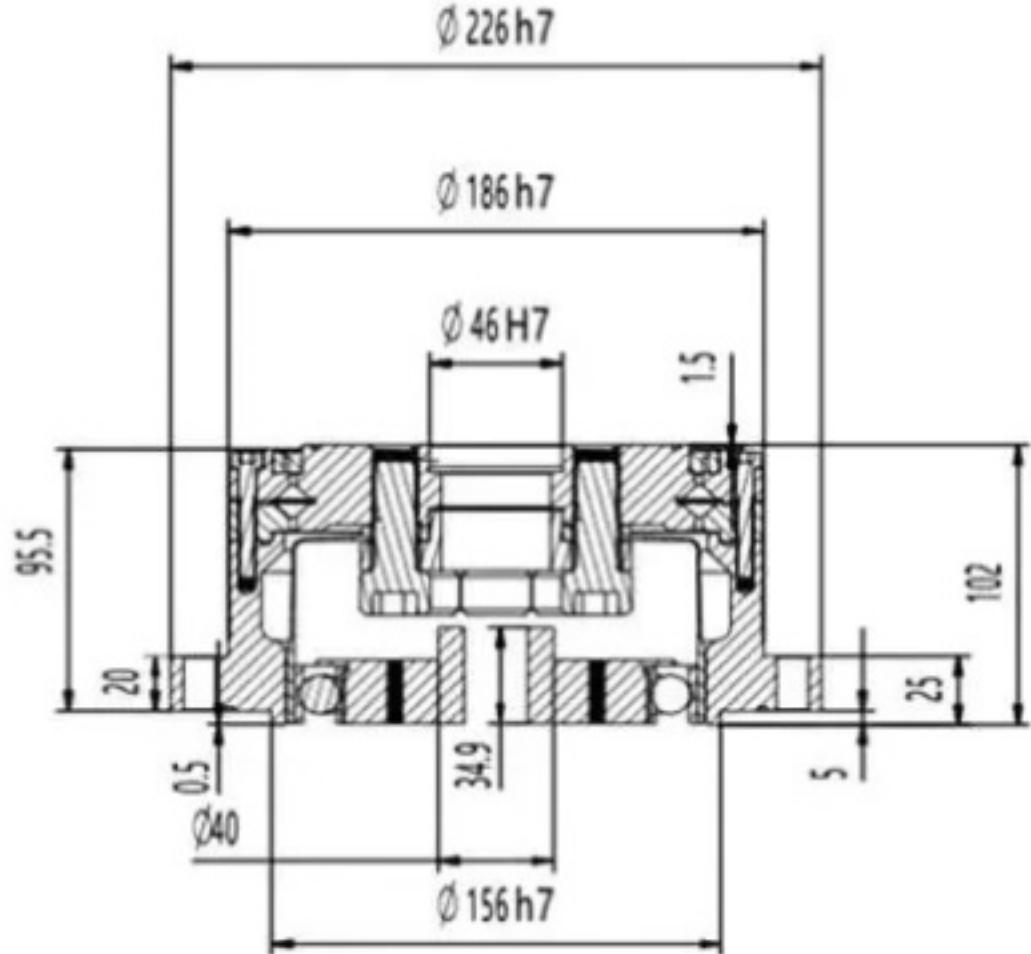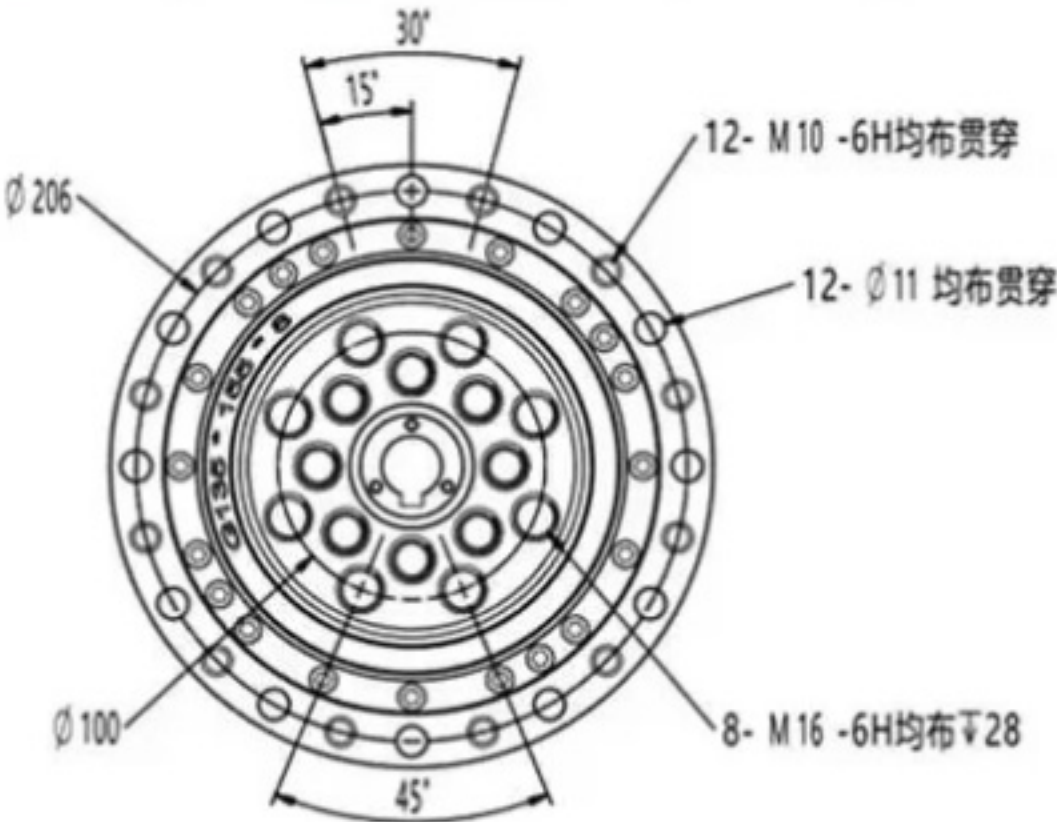

Adapted motor size-22mm Shaft 130mm Flange Servo Motor

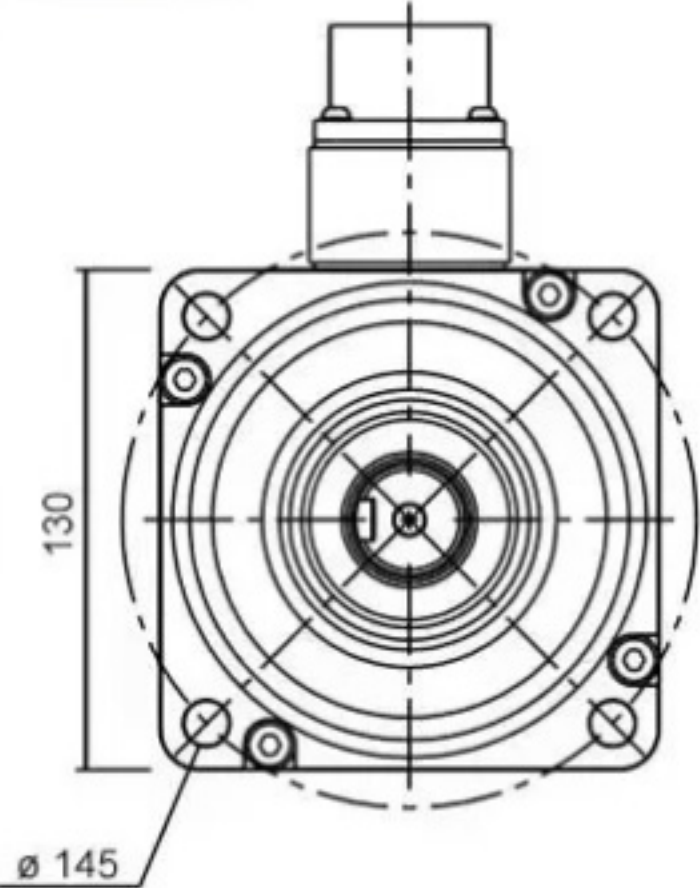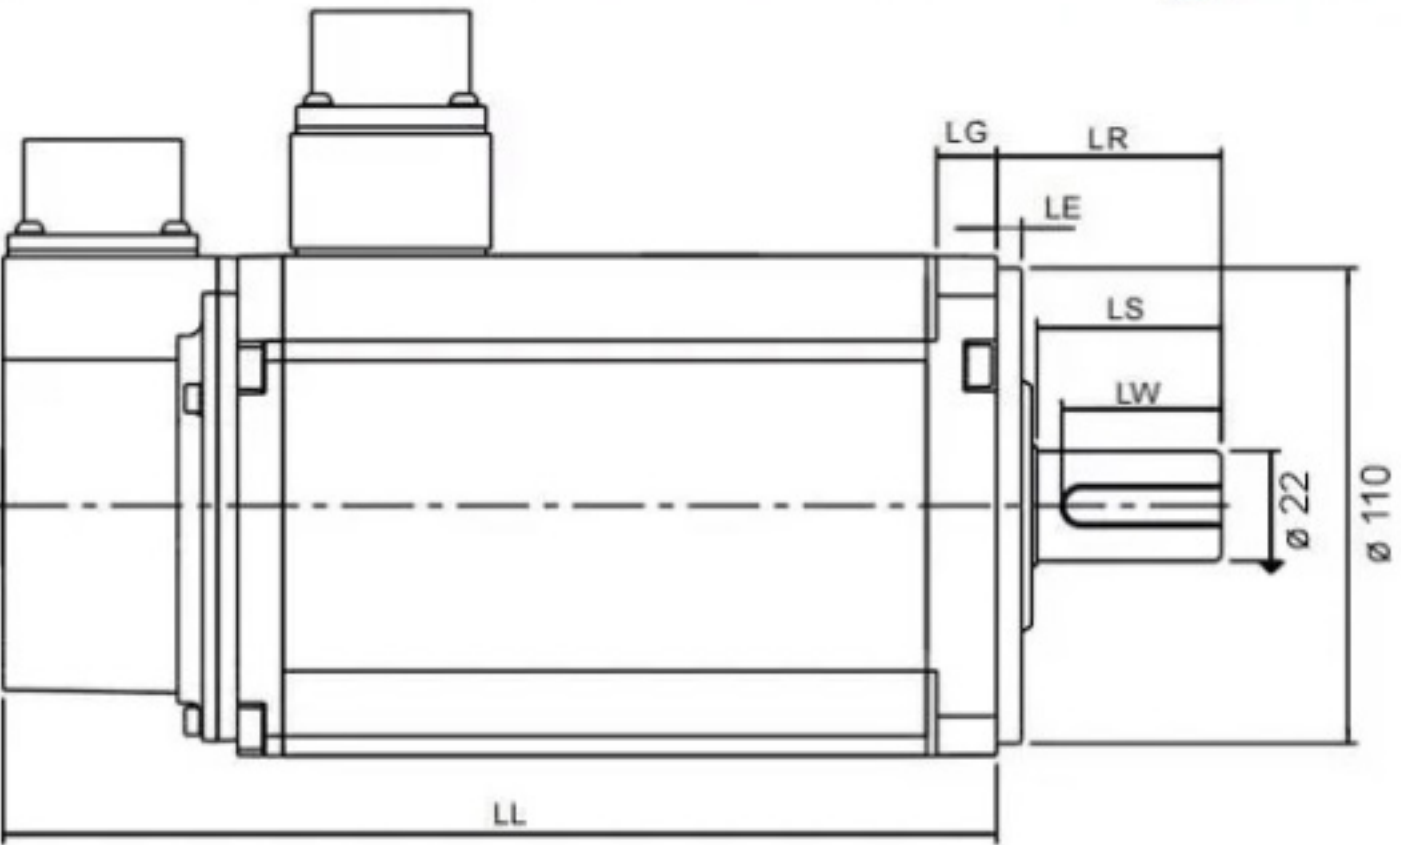

ZXS65 Harmonic Reducer

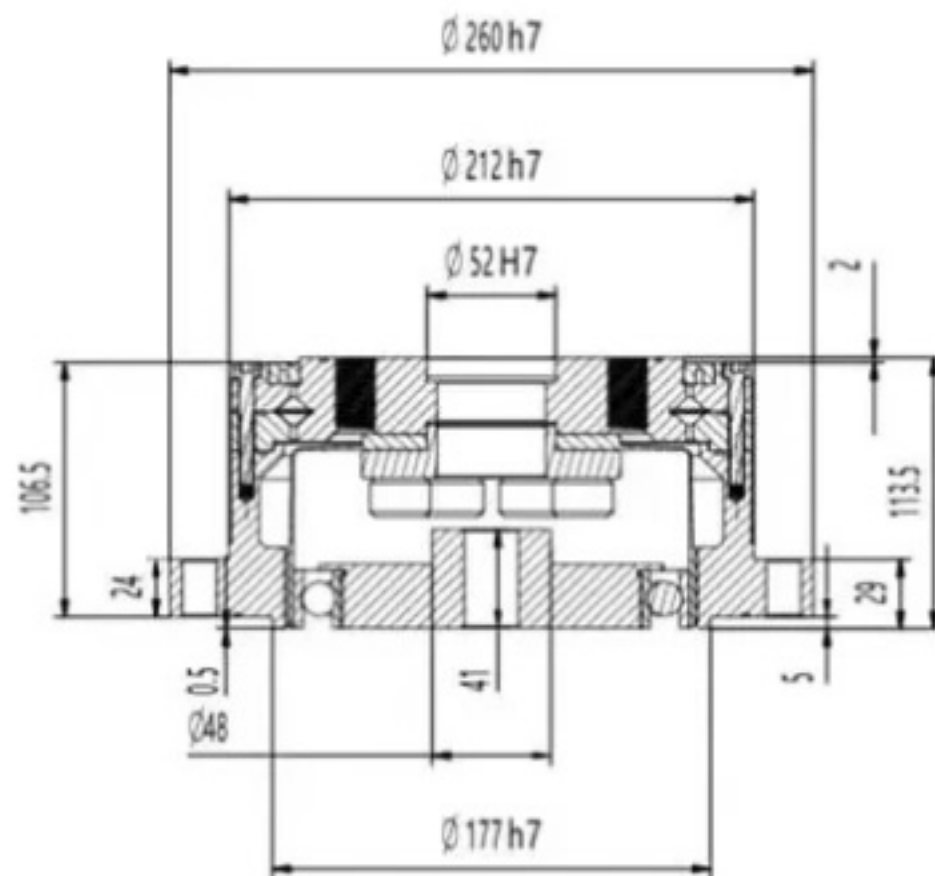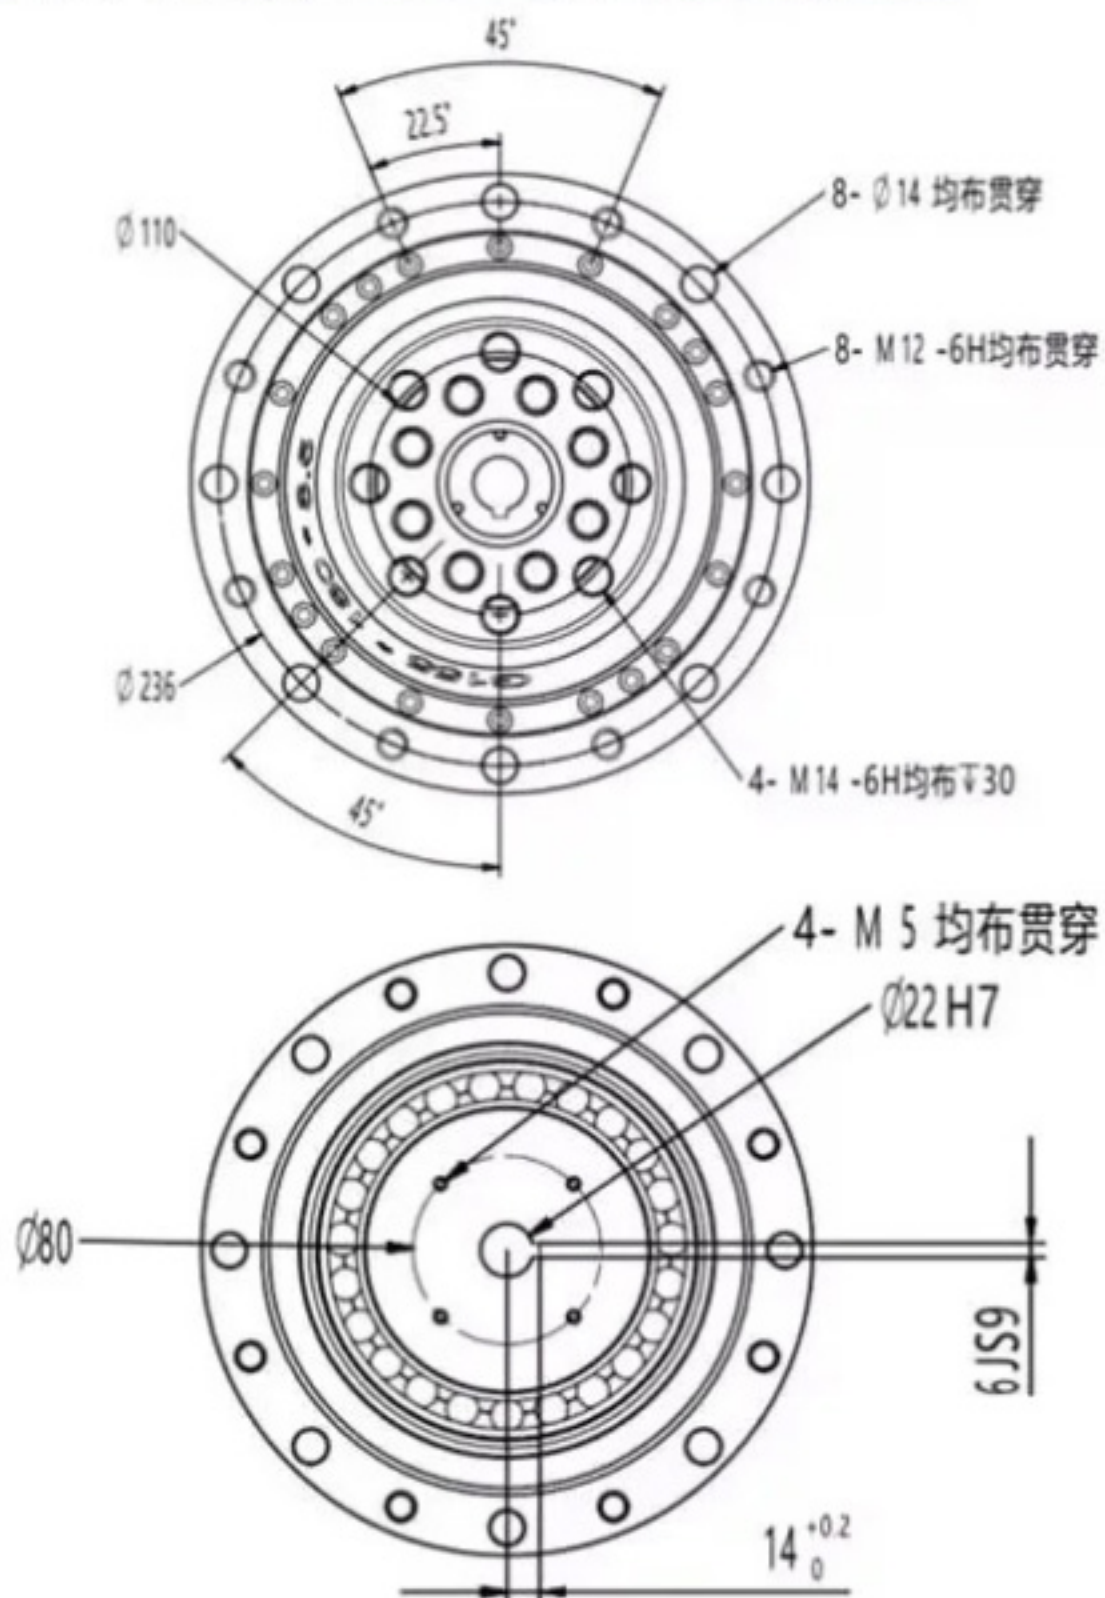

Adapted motor size—22mm Shaft 130mm Flange Servo Motor

